

Letter Report

**MILDOS-AREA: An Update with Incorporation
of *In Situ* Leach Uranium Recovery Technology***

E.R. Faillace, D.J. LePoire, S.-Y. Chen, and Y. Yuan**

Environmental Assessment Division

Argonne National Laboratory

9700 South Cass Avenue

Argonne, IL 60439

*Work supported by the U.S Nuclear Regulatory Commission and the U.S. Department of Energy, Assistant Secretary for Environmental Management, under Contract W-31-109-Eng-38.

**Yuan is affiliated with Square Y Consultants, Orchard Park, NY

May 1997

Contents

1. INTRODUCTION	1
2. PROJECT OBJECTIVES	2
3. MODIFICATIONS TO THE MILDOS-AREA CODE.....	2
4. SOURCE TERM ESTIMATION FOR A SAMPLE ISL FACILITY	3
4.1 New Well Field	4
4.2 Production Well Field.....	4
4.3 Dying and Packaging of Yellow Cake.....	7
4.4 Restoration Well Field.....	8
4.5 Releases from Land Application Areas.....	9
5. EXAMPLE OF SOURCE TERM CALCULATION FOR SAMPLE ISL FACILITY	10
5.1 Summary of Principal Operating Characteristics of the Single ISL Facility	13
5.2 New Well Field Drilling/Construction Area: Well Field.....	13
5.3 Production Well Field 2.....	14
5.4 Production Well Field 3.....	15
5.5 Restoration Well Field.....	16
5.6 Land Application (Irrigation) Area	17
5.7 Main Processing Facility	18
6. DESCRIPTION OF PATCH PROGRAM.....	19

7. REFERENCES.....19
Attachment 1: MILDOS-AREA Data Input File for Sample ISL Site21
Attachment 2: MILDOS-AREA Output File for Sample ISL Site.....25

Tables

3-1 Allowable Concentrations Used in MILDOS-AREA.....3
5-1 Source and Receptor Coordinates12

Figure

5-1 Map of Sample ISL Facility11

1 INTRODUCTION

The MILDOS-AREA computer code was developed at Argonne National Laboratory in 1989 (Yuan et al. 1989) for evaluating radiological impacts of uranium processing facilities. The code was modified from the original MILDOS code (Streng and Bander 1984) to include large-area sources and to incorporate changes in methods for dosimetry calculations. MILDOS-AREA estimates the radiological impacts of airborne emissions of radioisotopes of the uranium-238 series. Two different measures are calculated: dose commitments to human receptors and annual average air concentrations.

MILDOS-AREA incorporated dose conversion factors derived by the International Commission on Radiological Protection (ICRP) recommendations of 1978. The annual average air concentrations were compared with the maximum permissible concentrations (MPCs) in the U.S. Nuclear Regulatory Commission's *Standards for Protection against Radiation* (10 CFR Part 20). On January 1, 1994, a revision to 10 CFR Part 20 (revised Part 20) went into effect. The revised Part 20 updated its dosimetry to the ICRP 1978 recommendations. The dose limit to the general public also changed. The changes led to a revision of the calculated allowable concentrations for unrestricted areas, with MPC being replaced by the term "effluent concentrations." Therefore, the calculations performed by MILDOSAREA were not consistent with the current terminology and data contained in the revised Part 20.

In addition, a new method of recovering uranium gained popularity in the late 1980s, and now the majority of operating licensees use the *in situ* leach (ISL) method. In a typical ISL mining site (Hunter 1996), a licensee uses a series of injection wells that introduce dissolved oxygen and sodium carbonate/bicarbonate into the ore zone. The uranium is mobilized and is extracted through a series of pumping wells. The uranium-rich water is routed through a processing building, where the uranium is removed from the water by ion-exchange (IX) columns. The loaded IX resin is then processed to remove the uranium (elution). The eluted uranium is further processed into a concentrated uranium slurry. The slurry is then dried into yellow cake (U_3O_8). The dried U_3O_8 is packaged and shipped for further processing into enriched uranium and reactor fuel.

Some ISL facilities have smaller processing plants remote from the main processing plant. These plants, called satellite facilities, generally will collect the uranium in resin tanks and then ship the loaded resin to the main processing plant for elution, drying, and packaging. The satellite facilities allow the licensee to economically mine uranium a distance away from the main processing plant.

2 PROJECT OBJECTIVES

The overall objective of this project is to update the MILDOS-AREA code data structures and terminology to be consistent with revised 10 CFR Part 20. Another objective is the creation of an example problem for ISL facilities. Finally, the above objectives result in the creation of a patch program that will update current versions of MILDOS-AREA to the new version.

This report consists of three components: (1) modification of the data structure of the MILDOS-AREA code, (2) source term derivation for the ISL mining technology, and (3) application of this methodology in the sample problem. Finally, a computer patch program containing this updated information is described. This patch program is to be attached to MILDOS-AREA as an update for the particular application.

3 MODIFICATIONS TO THE MILDOS-AREA CODE

Two sets of modifications are made to the MILDOS-AREA code. These changes reflect both the semantic and the dosimetric revisions implemented in the revised 10 CFR Part 20.

The first modification consists of replacing all occurrences of MPC with allowable concentration (ALC). These changes affect the last page(s) of output for each time step (see Attachment II), where the concentrations of radionuclides in air at each receptor location are reported. These pages are now referred to as the “Results of the ALC Check at this Location.”

The second modification consists of replacing the old MPC values in the MILDOS-AREA database with the numbers currently tabulated under Effluent Concentrations (Air - Column 1) in Table 2 of Appendix B to the revised 10 CFR Part 20. An exception is radon-222 (Rn-222), where the ALC is expressed in units of working level (WL). The value for Rn-222 is derived as specified in the text of Appendix B; to revised Part 20; the occupational derived air concentration of 1/3 WL has been divided by 300. Table 3-1 lists the radionuclides and the ALCs used in MILDOS-AREA.

TABLE 3-1 Allowable Concentrations Used in MILDOS-AREA

Radionuclide	AC (Inhalation Class) (pCi/m ³)	Default Inhalation Class
Uranium-238	3(D), 1(W), 0.06(Y)	Y
Uranium-234	3(D), 1(W), 0.05(Y)	Y
Thorium-230	0.02(W), 0.03(Y)	W
Radium-226	0.9 (W)	W
Radon-222	1/900 (*)	(*)
Lead-210	0.6 (D)	D
Bismuth-210	500 (D), 40 (W)	W
Polonium-210	0.9 (D), 0.9 (W)	W

(*) Radon-222 is gaseous; the AC is reported in WLs.

4 SOURCE TERM ESTIMATION FOR A SAMPLE ISL FACILITY

The sources of radioactive effluent from an operating ISL uranium recovery facility include (1) the drilling operation at new well fields, (2) uranium extraction operations at production well fields, (3) drying and packaging of yellow cake, (4) restoration operations at old well fields, and (5) land application areas. The following sections describe a methodology for source term derivation for ISL sites that may be used instead of the methodology presented in NUREG/CR-4088 (Hartley et al. 1985). *Other methodologies may be more appropriate for a particular operating site.*

4.1 New Well Field

Conventional rotary rigs are commonly employed for all drilling activities at an ISL facility. Because all exploration drill holes are drilled by using and are sealed with high-viscosity bentonitic mud to maintain aquifer isolation, no particulates are expected to be released during drilling operations. The only source of radioactive release is the Rn-222 from radium-containing ore cuttings temporarily stored in the mud pit. During the period when the ore cuttings are awaiting disposal while stored in a mud pit, radioactive decay of radium-226 (Ra-226) is producing radon continuously. The amount of Rn-222 available for release, or the maximum release rate, in a year as a result of Ra-226 decay from ore cuttings in storage is assumed to be given by the following expression:

$$Rn_{mw} = 10^{-12} E L [Ra] T M N , \quad (1)$$

where

- Rn_{mw} = Rn-222 release rate from new well field (Ci/yr),
- 10^{-12} = unit conversion factor (Ci/pCi),
- $[Ra]$ = concentration of Ra-226 in ore (pCi/g),
- E = emanating power (dimensionless),
- L = decay constant of Rn-222 (0.181/d),
- T = storage time in mud pit (d),
- M = average mass of ore material in the pit (g), and
- N = number of mud pits generated per year.

4.2 Production Well Field

No particulate materials are expected to be released from the production well field because its process streams, from production and injection wells to IX columns in the satellite facility, are all in a closed-loop circuit. The primary radioactive emission from the process streams of the production well field is

Rn-222 gas. In the natural environment, radon emanates continuously in the ground and migrates through the rock or soil by both diffusion and convection. The movement of radon in groundwater in most cases is governed by water transport, rather than by diffusion (Hess et al. 1985; Mueller Associates, Inc. 1986). In an ISL production well field, the radon released from the ore body is readily removed by the process water ("lixiviant") moving through the well field by injection and production wells. The 3.8-day half-life of Rn-222 allows it to circulate along with the process water in the well field over a long time before it decays.

The general equation describing the change in Rn-222 concentration over time in the process water of a well field can be expressed as:

$$V \frac{dC_{Rn}}{dT} = fS - (L + v) V C_{Rn} - (F_p + F_i) C_{Rn} , \quad (2)$$

where

- V = volume of water in circulation (L),
- C_{Rn} = Rn-222 concentration in process water (pCi/L),
- f = fraction of radon source carried by circulating water (dimensionless),
- S = radon source (pCi/d),
- L = decay constant of Rn-222 (0.181/d),
- v = rate of radon venting from piping and valves during circulation (1/d),
- F_p = "purge" rate of treated water (L/d), and
- F_i = water discharge rate from resin unloading of IX columns (L/d).

The balance of the fraction of radon source carried by circulating water accounts for any radon in the mined area that is not swept into the injection-production well loop and remains trapped in the ore zone. The "purge" or "bleed" in the production well field is necessary to maintain a hydraulic cone of depression around each well field to prevent leakage of mining solutions outside the production zone.

The radon source term, S , can be expressed as

$$S = 10^6 \times L E [Ra] A D P , \quad (3)$$

where

- 10^6 = unit conversion factor (cm^3/m^3),
- E = emanating power of active ore zone (dimensionless),
- $[Ra]$ = Ra-226 concentration in ore zone (pCi/g),
- A = active area of ore zone (m^2),
- D = average thickness of ore zone (m), and
- P = bulk density of ore material (g/cm^3).

The water discharge rate from resin unloading, F_i , can be calculated by

$$F_i = N_i V_i P_i , \quad (4)$$

where

- V_i = volume content of IX column (L),
- N_i = number of IX column unloadings per day, and
- P_i = porosity of resin material.

Under steady-state conditions, the Rn-222 concentration in the process water, C_{Rn} , can be written as

$$C_{Rn} = \frac{10^6 [Ra] A D P E L f}{(L + v) V + F_p + F_i} . \quad (5)$$

When pressure is reduced during purging or when water is aerated during irrigation, radon is readily released to the atmosphere. The amount of Rn-222 available for release from the "purge" is dependent on the water volume purge rate, F_p , and on the Rn-222 concentration in the purged liquid, C_{Rn} . By conservatively assuming that all available radon in the purge water is released, the annual Rn-222 emission is

$$Rn_w = 3.65 \times 10^{-10} C_{Rn} F_p , \quad (6)$$

where

3.65×10^{-10} = unit conversion factor (Ci/pCi)(d/yr), and

Rn_w = Rn-222 release rate from purge water (Ci/yr).

The annual Rn-222 releases from occasional venting from wellheads and leaking transport piping are

$$Rn_v = 3.65 \times 10^{-10} v C_{Rn} V , \quad (7)$$

where Rn_v is the annual Rn-222 release from venting (Ci/yr).

The annual radon-222 discharge from the unloading of the IX column contents is

$$Rn_x = 3.65 \times 10^{-10} C_{Rn} F_i , \quad (8)$$

where Rn_x annual Rn-222 release from unloading of IX column content (Ci/yr).

The total annual Rn-222 release from the production well field is the sum of Rn_w , Rn_v , and Rn_x .

The occurrence of radon in water is controlled by the chemical concentration of radium in the host soil or rock and the emissivity of radon into water. Radon enters air-filled pores in the soil mainly because of the recoil of radon atoms on the decay of Ra-226. The fraction of radon formed in the soil which enters the pores is called the emanating power; reported values range from about 1% to 80%, with an average of 20%, depending on soil type, pore space, and water content (Mueller Associates, Inc. 1986). Varying environmental conditions have been found to affect the rate of radon emanation. In particular, moisture has been found to have significant effects on the radon emanation rate. For purposes of conservatively estimating the radon release from ISL well fields, the emanating power is assumed to be 0.25.

4.3 Drying and Packaging of Yellow Cake

For facilities using rotary vacuum dryers for processing yellow cake, no particulate emissions are expected under normal operating conditions. For facilities using thermal drying, stack releases may be

estimated on the basis of information provided by a number of operating ISL uranium recovery facilities. Although more data are needed, the stack release of yellow cake has been estimated to be about 0.05% of the amount produced; however, because the day-to-day variations of particulate release rates can vary by several times, the assumption is that 0.1% of the uranium produced escapes as particulates into the atmosphere, as suggested in the *Final Generic Environmental Impact Statement on Uranium Milling* (NRC 1980).

The particulate release of nuclides other than uranium isotopes is estimated by grab samples reported by ISL facilities (e.g., Semiannual Reports for Highland Uranium Project, Irigary and Christensen Ranch Projects, Crownpoint, and others). On the basis of the field measurements, the conservative assumption is that the activities of thorium (0.15-0.4% of measured values), radium (0.2-0.3%), lead, polonium, and its decay progeny are 0.5% of the U-238 activity in the yellow cake. Furthermore, it may be assumed that the fraction of this activity that is released is the same as the fraction of uranium (0.1%) that is released.

4.4 Restoration Well Field

The basic operating processes of the restoration well field are similar to those of the production well field. Groundwater affected by leaching processes in the production well fields is restored to its premining levels (1) by the "pump and treat" (groundwater sweep) method and by flushing with fresh water injection, and (2) by using the permeative stream from reverse-osmosis treatment units. Like the production well field, no particulate materials are expected to be released from the restoration well field operations. The primary source of radioactive release is the Rn-222 gas in the process water circulating within and discharged from the restoration operations. The annual Rn-222 releases from the restoration well field therefore can be calculated by Equations 6 and 7.

4.5 Releases from Land Application Areas

Radionuclide-containing water, either from purge water from production well fields or from restoration wastewater from restoration well fields, is treated to unrestricted release levels and disposed of by irrigation. Release onto the soil surface will contaminate the soil at the land application areas. The radionuclides adsorbed by the soil will become a source term for radioactive release through wind erosion processes. To estimate this wind-generated source term by using MILDOS-AREA, the radionuclide concentrations in the soil needs to be estimated first. The radionuclide concentration in the contaminated surface soil region of the land application area, C_s , is calculated by

$$C_s = \frac{10^{-3} C_{tw} V_o R_s}{A_s S_d P_s}, \quad (9)$$

where

- C_s = radionuclide concentration in the surface soil (pCi/g),
- 10^{-3} = unit conversion factor (L/cm³),
- V_o = total volume of water released onto the land application area (m³),
- C_{tw} = radionuclide concentration in treated water (pCi/L),
- A_s = area of land application (m²),
- S_d = assumed depth of contaminated area (m),
- P_s = bulk density of surface soil (g/cm³), and
- R_s = fraction of radionuclide in irrigation water retained in the soil particles (dimensionless).

The fraction of radionuclides in irrigation water retained in the soil particles, R_s , can be calculated with the following formula:

$$R_s = \left(1 - \frac{I}{R_d}\right) . \quad (10)$$

The retardation factor, R_d , can be calculated with the following formula:

$$R_d = 1 + \frac{P_s K_d}{w}, \quad (11)$$

where

- K_d = radionuclide distribution coefficient (cm^3/g), and
 w = soil volume water content (dimensionless).

The volumetric water content of the soil, w , is the fraction of the total porosity of the soil material occupied by water. The radionuclide distribution coefficient is the ratio of the radionuclide equilibrium concentration of the adsorbed radionuclide in soil to the desorbed radionuclide in water. Representative distribution coefficients can be found in the report by Yu et al. (1993).

5.0 EXAMPLE OF SOURCE TERM CALCULATION FOR SAMPLE ISL FACILITY

The following example illustrates some typical calculations that may be used to derive the source term at a hypothetical operating ISL uranium recovery facility. The example covers the potential operations that may result in radionuclide releases to the air from a typical facility. An input file for use by the MILDOS-AREA code is provided for this example (Attachment I), as well as the doses to hypothetical receptors calculated by the code (Attachment II). Note that reasonable assumptions for input parameters have been used for this hypothetical site, *but these input data are not intended to serve as substitutes for data collected at actual operating facilities.*

The layout of the hypothetical site is shown in Figure 5-1. It consists of a main processing facility, a satellite facility, one well field under development (active well field 1, two production well fields (active well fields 2 and 3), a restoration well field, two radium-settling ponds (P1 and P2), a holding pond, and an irrigation plot. Only small portions of the well fields are assumed to be active over any one-year period of operations. Eight receptor locations are identified. Of these, location 5 is included within a cattle grazing area to estimate the dose from consumption of livestock products that may become contaminated from site releases. Source and receptor locations are reported in kilometers east (x coordinate) and north (y coordinate) of the dryer stack in the main processing facility. Negative values of x and y coordinates indicate west and south directions, respectively. Table 5-1 lists the coordinates

FIGURE 5-1 Map of Sample ISL Site (MPF = main processing facility P1 and P2 = radium setting ponds; and SF = satellite facility)

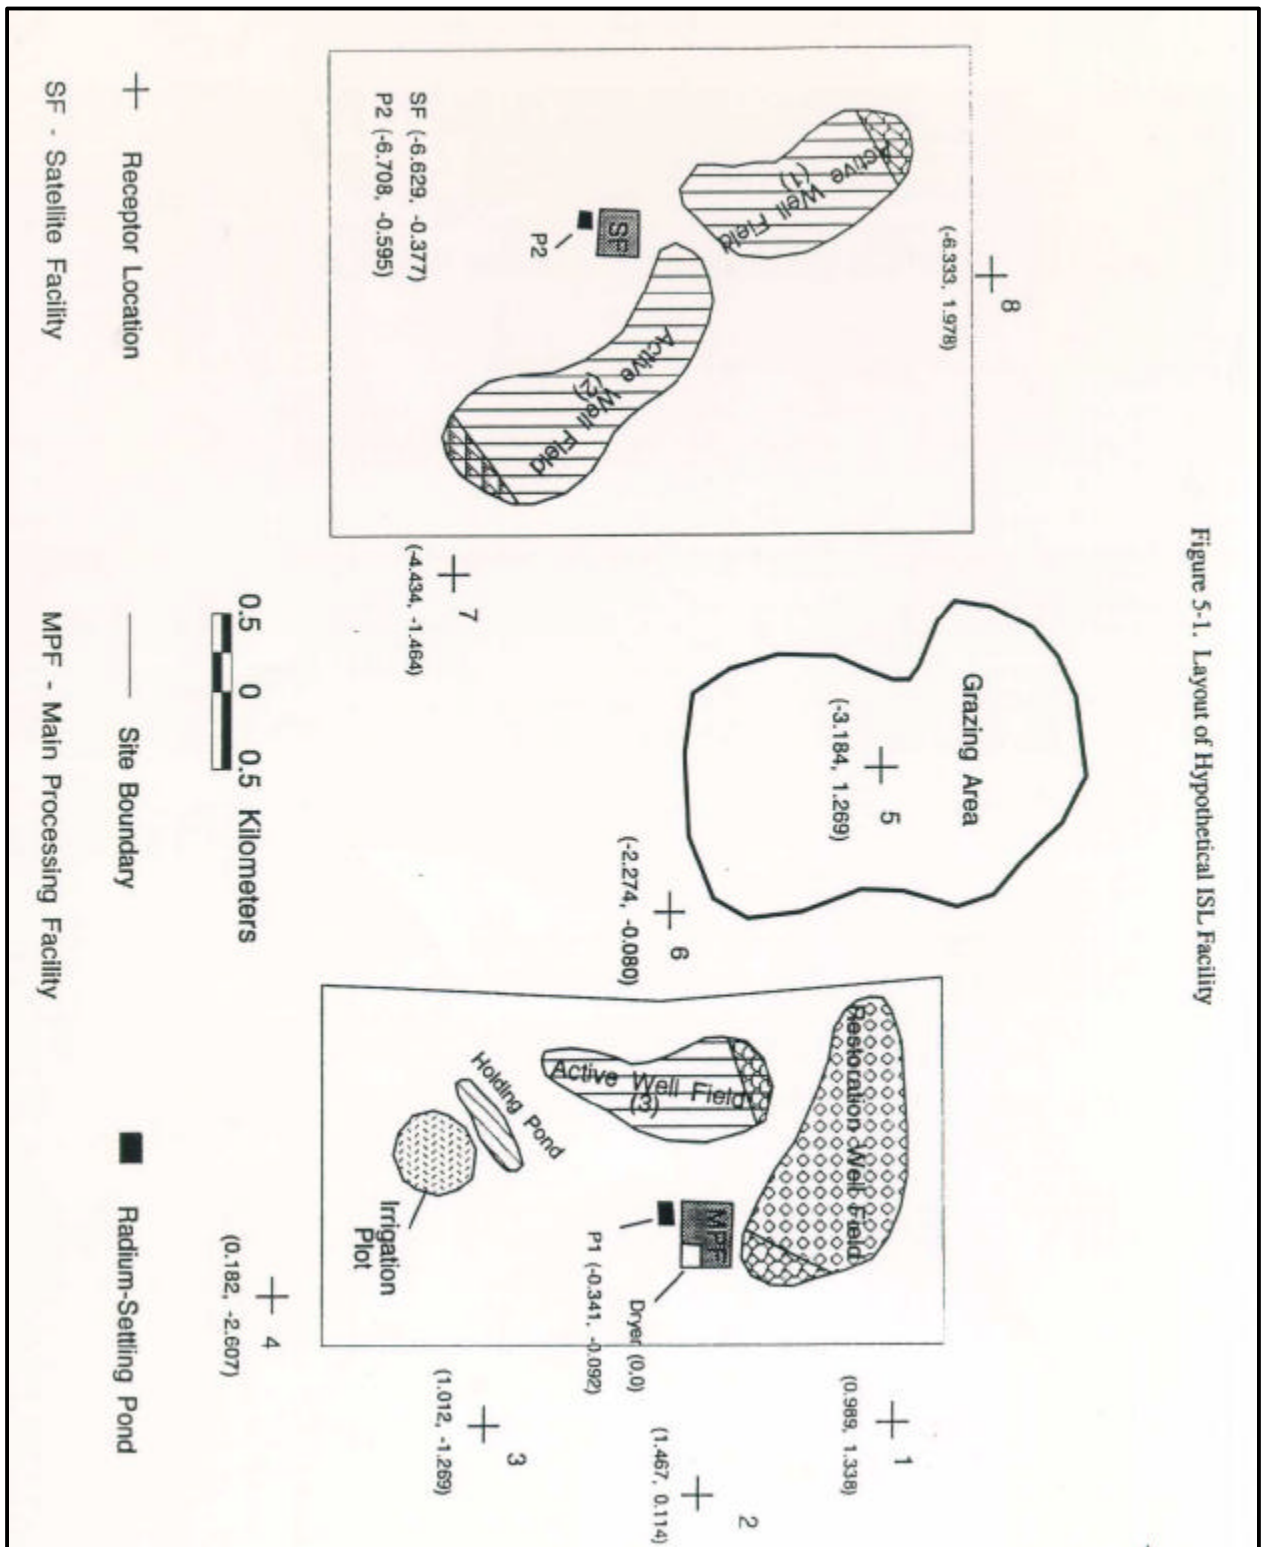


Figure 5-1. Layout of Hypothetical ISL Facility

TABLE 5-1 Source and Receptor Coordinates

Source	East (km)	North (km)	Receptor	East (km)	North (km)
1. Yellow Cake Dryer Stack	0.000	0.000	Receptor 1 (Individual)	0.989	1.338
2. Main Processing Facility IX Columns	0.000	0.000	Receptor 2 (Individual)	1.467	0.114
3. Satellite-Facility	-6.629	-0.377	Receptor 3 (Individual)	1.012	-1.269
4. Radium-Settling Pond 1	-0.341	-0.092	Receptor 4 (Individual)	0.182	-2.607
5. Radium Settling Pond 2	-6.708	-0.595	Receptor 5 (Grazing)	-3.184	1.269
6. Active Well Field 1 (Area Source)	-7.363	1.162	Receptor 6 (Individual)	-2.274	-0.08
	-7.380	1.313	Receptor 7 (Individual)	-4.434	-1.464
	-7.145	1.464	Receptor 8 (Individual)	-6.333	1.978
	-6.893	1.380			
7. Active Well Field 2 (Area Source)	-5.449	-1.489			
	-4.879	-1.053			
	-5.080	-1.438			
	-5.282	-1.556			
8. Active Well Field 3 (Area Source)	-1.423	0.307			
	-1.305	0.525			
	-1.104	0.575			
	-0.886	0.441			
9. Restoration Well Field (Area Source)	-0.248	0.407			
	0.054	0.927			
	0.137	0.575			
	-0.014	0.374			
10. Irrigation Plot (Area Source)	-0.669	-1.839			
	-0.830	-1.825			
	-0.952	-1.704			
	-0.911	-1.448			

used in the input data file for each source and receptor. The meteorology for the site is assumed to be the generic file provided with the code.

5.1 Summary of Principal Operating Characteristics of the Sample ISL Facility

The following parameters apply to the entire facility:

Yellow cake production rate = 520 metric ton (MT)/yr

Average ore activity, U-238 and each progeny in secular equilibrium = 280 pCi/g

Ore porosity = 0.28

Ore density = 1.8 g/cm³

5.2 New Well Field Drilling/Construction Area (Well Field 1):

A portion of well field 1, located north of the satellite facility, is under development, as follows:

Number of new wells per peak year = 600

Number of new wells per mud pit = 12

Number of mud pits = 600/12 = 50

Ore zone thickness = 5 m

Drill hole diameter = 8 in.

Average ore material per well (g) = $3.14 \times (8 \text{ in} / 2 \times 2.54 \text{ cm/in})^2 \times 500 \text{ cm} \times 1.8 \text{ g/cm}^3 = 2.9 \times 10^5$

Total ore material in mud pit per year (g) = 3.5×10^6

Average storage time of ore grade material in mud pits = 12 d

Radon emanating power = 0.25

For this location, on the basis of an average Ra-226 concentration of 280 pCi/g, the annual Rn-222 emission from the mud pit can be estimated by using Equation 1:

$$\begin{aligned} Rn_{mw} &= 10^{-12} \text{ Ci/pCi} \times 0.25 \times 0.181/\text{d} \times 280 \text{ pCi/g} \times 12 \text{ d} \times 3.5 \times 10^6 \text{ g} \times 50/\text{yr} \\ &= 0.027 \text{ Ci/yr} \end{aligned}$$

The radon flux can then be estimated by dividing the total emission rate by the area under development as follows:

$$\begin{aligned} \text{Area of active drilling per year} &= 60,000 \text{ m}^2 \\ \text{Average Rn-222 flux rate} &= (10^{12} \text{ pCi/Ci} \times 0.027 \text{ Ci/yr}) / [60,000 \text{ m}^2 \times (3.15 \times 10^7 \text{ s/yr})] \\ &= 0.0143 \text{ pCi/m}^2/\text{s} \end{aligned}$$

5.3 Production Well Field 2

The following assumptions are used for the production well field located just to the east of the satellite facility:

$$\text{Operating days per year} = 365$$

Dimensions of the active ore body:

$$\text{Peak area per year to be mined} = 50,000 \text{ m}^2$$

$$\text{Average thickness of ore bodies} = 3 \text{ m}$$

$$\text{Total flow volume in circulation in well field} = 50,000 \times 3 \times 0.28 = 42,000 \text{ m}^3 = 4.2 \times 10^7 \text{ L}$$

The following assumptions are made for the satellite facility:

$$\text{Dimensions or capacity of resin column} = 3,500 \text{ gal}$$

$$\text{Resin porosity} = 0.4$$

$$\text{Number of loaded resin unloadings per day} = 3$$

$$\begin{aligned} \text{Water discharge rate from unloading of IX column} \\ = 3,500 \text{ gal} \times 0.4 \times 3.785 \text{ L/gal} \times 3/\text{d} = 1.6 \times 10^4 \text{ L/d} \end{aligned}$$

$$\begin{aligned} \text{Total wastewater "purge" rate} &= 100 \text{ gallons per minute (gpm)} \\ &= 100 \text{ gpm} \times 3.785 \text{ L/gal} \times 60 \text{ min/h} \times 24 \text{ h/d} = 5.5 \times 10^5 \text{ L/d} \end{aligned}$$

$$\text{Fraction of radon source carried by circulating water} = 0.8$$

$$\text{Rate of radon venting during circulation} = 0.01/\text{d}$$

The radon concentration in circulating water is derived by using Equation 5* :

$$C_{Rn} = [(10^6 \times 280 \times 50,000 \times 3 \times 1.8 \times 0.25 \times 0.181) \times 0.8] /$$

*To reduce the length of this and other calculations, most of the units have been omitted. The reader is referred back to the equations in Chapter 4 for details on parameter descriptions and units.

$$\begin{aligned} & \{[0.191 \times (4.2 \times 10^7)] + [(5.5 \times 10^5) + (1.6 \times 10^4)]\} \\ & = [(3.4 \times 10^{12}) \times 0.8] / (8.6 \times 10^6) = 3.2 \times 10^5 \text{ pCi/L} \end{aligned}$$

The radon release rate from purge water into settling pond P2 is derived by using Equation 6:

$$\begin{aligned} Rn_w & = (3.65 \times 10^{-10}) \times (3.2 \times 10^5) \times (5.5 \times 10^5) \\ & = 64 \text{ Ci/yr} \end{aligned}$$

The radon release rate from gas venting and leaking during circulation is derived by using Equation 7:

$$\begin{aligned} Rn_v & = (3.65 \times 10^{-10}) \times 0.01 \times (3.2 \times 10^5) \times (4.2 \times 10^7) \\ & = 49 \text{ Ci/yr} \end{aligned}$$

The radon release rate from IX unloading is derived by using Equation 8:

$$\begin{aligned} Rn_x & = (3.65 \times 10^{-10}) \times (3.2 \times 10^5) \times (1.6 \times 10^4) \\ & = 1.9 \text{ Ci/yr} \end{aligned}$$

The total radon release from production well field 2 = 115 Ci/yr.

5.4 Production Well Field 3

The following assumptions are used for the production well field located just to the west of the main processing facility:

Operating days per year = 365

Dimensions of the active ore body:

Peak area per year to be mined = 55,000 m²

Average thickness of ore bodies = 5 m

Total flow volume in circulation in well field

$$= 55,000 \times 5 \times 0.28 = 77,000 \text{ m}^3 = 7.7 \times 10^7 \text{ L}$$

The same parameters used for the satellite facility servicing well field 2 apply to the IX facility used for well field 3. The following source terms have been derived by using Equations 5 to 8.

The radon concentration in circulating water for well field 3 is given by

$$\begin{aligned} C_{Rn} & = [(10^6 \times 280 \times 55,000 \times 5 \times 1.8 \times 0.25 \times 0.181) \times 0.8] / \\ & \quad \{[0.191 \times (7.7 \times 10^7)] + [(5.5 \times 10^5) + (1.6 \times 10^4)]\} \\ & = [(6.3 \times 10^{12}) \times 0.8] / (1.53 \times 10^7) = 3.3 \times 10^5 \text{ pCi/L} \end{aligned}$$

The radon release rate from purge water into settling pond P1 is given by

$$\begin{aligned} Rn_w &= (3.65 \times 10^{-10}) \times (3.3 \times 10^5) \times (5.5 \times 10^5) \\ &= 66 \text{ Ci/yr} \end{aligned}$$

The radon release rate from gas venting and leaking during circulation is given by

$$\begin{aligned} Rn_v &= (3.65 \times 10^{-10}) \times 0.01 \times (3.3 \times 10^5) \times (7.7 \times 10^7) \\ &= 93 \text{ Ci/yr} \end{aligned}$$

The radon release rate from IX unloading is given by

$$\begin{aligned} Rn_x &= (3.65 \times 10^{-10}) \times (3.3 \times 10^5) \times (1.6 \times 10^4) \\ &= 1.9 \text{ Ci/yr} \end{aligned}$$

The total radon release from production well field 3 = 161 Ci/yr.

5.5 Restoration Well Field

The following assumptions were used for the restoration well field north of the main processing facility:

Expected restoration operation time = 7 yr

Operating days per year = 240

Dimensions of restoration ore body:

Area per year to be restored = 100,000 m²

Average thickness of ore bodies = 5 m

Total flow volume in circulation in well field

$$= 100,000 \times 5 \times 0.28 = 140,000 \text{ m}^3 = 1.4 \times 10^8 \text{ l}$$

Total treated water "purge" rate = 200 gpm

$$= 200 \text{ gpm} \times 3.785 \text{ L/gal} \times 60 \text{ min/h} \times 24 \text{ h/d} = 1.1 \times 10^6 \text{ L/d}$$

Fraction of radon source carried by circulating water = 0.8

Rate of radon venting during circulation = 0.01/d

The following source terms have been derived by using Equations 5 to 7.

The radon concentration in circulating water for the restoration well field is given by

$$C_{Rn} = [(10^6 \times 280 \times 100,000 \times 5 \times 1.8 \times 0.25 \times 0.181) \times 0.8] /$$

$$\begin{aligned} & \{[0.191 \times (1.4 \times 10^8)] + (1.1 \times 10^6)\} \\ & = [(1.1 \times 10^{13}) \times 0.8] / (2.8 \times 10^7) = 3.3 \times 10^5 \text{ pCi/L} \end{aligned}$$

The radon release rate from purge water into settling pond P1 is given by

$$\begin{aligned} Rn_w &= (240/365) \times (3.65 \times 10^{-10}) \times (3.3 \times 10^5) \times (1.1 \times 10^6) \\ &= 87 \text{ Ci/yr} \end{aligned}$$

The radon release rate from gas venting and leaking during circulation is given by

$$\begin{aligned} Rn_v &= (240/365) \times (3.65 \times 10^{-10}) \times 0.01 \times (3.3 \times 10^5) \times (1.4 \times 10^8) \\ &= 110 \text{ Ci/yr} \end{aligned}$$

The total radon release from the restoration well field = 197 Ci/yr.

5.6 Land Application (Irrigation) Area

The following assumptions are made for the irrigation plot:

Radionuclide concentrations in the holding pond:

U-238 = 1,200 pCi/L

Th-230 = 5 pCi/L

Ra-226 and all progeny = 30 pCi/L

Land irrigation operation water flow rate = 400 gpm

$$= 400 \text{ gpm} \times 3.785 \text{ L/gal} \times 60 \text{ min/h} \times 24 \text{ h/d} = 2.2 \times 10^6 \text{ L/d}$$

Land irrigation operation = 122 d/yr

Land irrigation operation lifetime = 7 yr

Total volume water released over operation lifetime

$$= (2.2 \times 10^6 \text{ L/d}) \times 122 \text{ d/yr} \times 7 \text{ yr} \times 10^{-3} \text{ m}^3/\text{L} = 1.9 \times 10^6 \text{ m}^3$$

Total area of clean wastewater land application = 185,000 m²

Assumed depth of contaminated area = 0.15 m

Density of soil = 1.6 g/cm³

Soil volume water content = 0.25

Distribution coefficient of soil (cm³/g):

Uranium = 50

Thorium = 60,000

Radium = 70

Lead = 100

The retardation factors of surface soil, calculated by using Equation 11, are

Uranium = 320

Thorium = 380,000

Radium = 450

Lead = 640

The fraction of radionuclides in irrigation water that is retained in the surface soil, calculated by using Equation 10, is

Uranium = 1

Thorium = 1

Radium = 1

Lead = 1

The land application area peak surface soil radionuclide concentrations, calculated by using Equation 9, are

$$\begin{aligned} \text{U-238} &= (10^{-3} \times 1,200 \times 1.9 \times 10^6 \times 1) / (185,000 \times 0.15 \times 1.6) \\ &= 0.043 \times 1,200 = 51 \text{ pCi/g} \end{aligned}$$

$$\text{Th-230} = 0.043 \times 5 = 0.21 \text{ pCi/g}$$

$$\text{Ra-226} = 0.043 \times 30 = 1.3 \text{ pCi/g}$$

$$\text{Pb-210} = 0.043 \times 30 = 1.3 \text{ pCi/g}$$

$$\text{Radon flux} = 1.3 \text{ pCi/g} \times 1.0 \text{ (pCi/m}^2\text{/s)/(pCi/g)} = 1.3 \text{ (pCi/m}^2\text{/s)}$$

5.7 Main Processing Facility

The following assumptions apply to the main processing facility:

Yellow cake (U_3O_8) production = 520 MT/yr

Stack release rate:

U-238

$$= 520 \text{ MT/yr} \times 0.001 \times 10^6 \text{ g/MT} \times 0.85 \text{ g U-nat/g } \text{U}_3\text{O}_8 \times (3.3 \times 10^{-7} \text{ Ci U-238/g U-nat})$$

= 0.146 Ci/yr

Th-230

= 0.146 × 0.005 = 0.00073 Ci/yr

Ra-226, Pb-210, and Po-210

= 0.146 × 0.005 = 0.00073 Ci/yr

6.0 DESCRIPTION OF PATCH PROGRAM

The revisions to the MILDOS-AREA code are incorporated in the following files:

- **MILMAIN.EXE.** This file is the FORTRAN executable file containing the revisions discussed in Chapter 3. It replaces the old MILMAIN.EXE.
- **SAMPISL.DAT.** This file is the input data file for the example ISL facility described in Chapter 5. It is listed in Attachment I.
- **MILDOS.UPD.** This data file contains the updated allowable concentration levels for the radionuclides listed in Table 3-1.
- **README.TXT.** This text file contains instructions to MILDOS-AREA on how to replace the old MILMAIN.EXE with the new version and how to copy the other two files to the user's MILDOS directory.

7.0 REFERENCES

Hartley, J.N. et al., 1985, *Methods for Estimating Radioactive and Toxic Airborne Source Terms for Uranium Milling Operations*, NUREG/CR-4088, PNL-5338, prepared by Pacific Northwest Laboratory, Richland, Wash., for the U.S. Nuclear Regulatory Commission, Washington, D.C., June.

Hess, C.T., et al., 1985, "The Occurrence of Radioactivity in Public Water Supplies in the United

States,” *Health Physics*, vol. 48, No. 5, May.

Hunter, J., 1996, “Making a Success of In-Situ Leaching at the Highland Uranium Project,” presented at the annual meeting of the Society for Mining, Metallurgy, and Exploration, Phoenix, Ariz., March 11-14.

Mueller Associates, Inc., 1986, *Indoor Air Quality Environmental Information Handbook: Radon*, DOE/PE/720132-2, prepared by Mueller Associates, Inc., Baltimore, Md., for U.S. Department of Energy, Washington, D.C.

NRC: see U.S. Nuclear Regulatory Commission.

Streng, D.L., and T.J. Bander, 1984, *MILDOS — A Computer Program for Calculating Environmental Radiation Doses from Uranium Recovery Operations*, NUREG/CR-2011, PNL-3767, Pacific Northwest Laboratory, Richland, Wash., for the U.S. Nuclear Regulatory Commission, Washington, D.C.

U.S. Nuclear Regulatory Commission, 1980, *Final Generic Environmental Impact Statement on Uranium Milling*, NUREG-0760, Washington, D.C., Sept.

Yu, C., et al., 1993, *Manual for Implementing Residual Radioactive Material Guidelines Using RESRAD, Version 5.0*, ANL/EAD/LD-2, Argonne National Laboratory, Argonne, Ill., Sept.

Yuan, Y.C., J.H.C. Wang, and A.J. Zielen, 1989, *MILDOS-AREA: An Enhanced Version of MILDOS for Large-Area Sources*, ANL/ES-161, Argonne National Laboratory, Argonne, Ill., June.

Attachment I:

MILDOS-AREA Data Input File for Sample ISL Site

```
&INDATA
IFTODO=2*1,8*0,
IRTYPE=8*0,40*-1,
JC=1,0,1,2*0,2*1,0,1,0,
FRADON=0.86,0.06,0.04,0.04,
IPACT=9*0,1,
NSORCE=10,
PACT= 51.,2*0, 0.21,2*0, 1.3,2*0, 1.3,2*0,
QAJUST= 1,9*0, 1,9*0, 1,9*0, 1,9*0, 1,9*0, 1,9*0, 1,9*0, 1,9*0, 1,9*0,
        1,9*0, 1,9*0, 1,9*0, 1,9*0, 1,9*0, 1,9*0, 1,9*0, 1,9*0,
        1,9*0, 1,9*0, 10*1, 10*1,
SORCE=
    0.0, 0.0, 20.0, 0.0,1.46E-1,3*7.3E-4,0.0,1101,1,17.0,
    0.0, 0.0, 0.0, 0.0, 4*0.0, 1.9, 1102, 1, 0.0,
    -0.341,-0.092, 0.0, 0.0, 4*0.0, 153., 1203, 1, 0.0,
    -6.629,-0.377, 0.0, 0.0, 4*0.0, 1.9, 1304, 1, 0.0,
    -6.708,-0.595, 0.0, 0.0, 4*0.0, 64., 1305, 1, 0.0,
    -7.0, 1.2, 0.0, 0.06, 4*0.0, 0.027, 2001, 3, 0.0,
    -5.3, -1.3, 0.0, 0.050, 4*0.0, 49.0, 2002, 3, 0.0,
    -1.2, 0.3, 0.0, 0.055, 4*0.0, 93.0, 2003, 3, 0.0,
    -0.23, 0.5, 0.0, 0.10 4*0.0, 110.0, 2004, 3, 0.0,
    -0.776,-1.354, 0.0, 1, 4*1.0, 1.0, 6001, 3, 0.0,
FAS= 3*-1.,
SRNS=1.3,1,1,
HDP=50.0,
FREQ =
.00038, .00011, .00021, .00009, .00018, 2*.00013,
.00006, .00027, 2*.00006, .00009, .00006, .0001,
.00006, .0001, .00021, 2*.00027, 2*.00021, 2*.00007,
.00014, .00041, 2*.00014, .00021, .00014, 0,
.00014, 65*0, .00181, .00115, .0014, .00158,
.00168, .0006, .00128, .00095, .00361, .00176,
.00068, .00096, .00093, .00058, .00107, .00056,
.00199, .00103, .00151, .00116, .00082, .00062,
.00082, .00123, .00253, .00123, .0011, .00082,
.00158, .00055, .00103, .00089, 2*.00082, 2*.00055,
.00021, .00007, .00034, .00075, .00199, .00041,
.00062, .00041, .00048, .00069, .00055, .00027,
48*0, .00068, .00053, .00067, .00052, .0006,
.00032, .00062, .00074, .00171, .00068, .00056,
.00034, .00028, .00029, .00059, .00028, .00329,
.00219, .00206, 2*.00096, .00062, .0011, .00089,
.00514, .00212, .00069, .00075, .00151, .00103,
2*.00089, .00404, .00253, .00233, .00137, .00048,
.00007, .00055, .00281, .01062, .00288, .00103,
.00116, .00411, .00377, .00315, .00185, 2*.00027,
.00034, .00027, 3*0, .00069, .00226, .00014,
2*.00021, .00116, .00158, .00075, .00021, 12*0,
.00007, .00021, .00007, 17*0, .00709, .00308,
.00332, .00296, .0026, .00169, .0022, .00229,
.0073, .00197, .0021, .00129, .00175, .00136,
.0018, .00166, .02028, .00849, .00692, .00377,
.00233, .00199, .00397, .00514, .02124, .00617,
.00377, .00356, .00466, .00411, .005, .00507,
```

```

.02041, .01103, .00527, .0026, .0013, .00103,
.00349, .01048, .05747, .01178, .00432, .00486,
.01671, .0163, .01075, .00692, .00836, .00849,
.0063, .00158, .00027, .00041, .00151, .0087,
.05439, .01212, .00185, .00322, .03213, .05556,
.02466, .00425, .00075, .00062, .00041, .00007,
0, .00007, 0, .00055, .00459, .00123,
.00014, .00027, .00699, .01932, .00521, .00062,
2*0, .00007, 5*0, .00014, 2*0, .00007,
.00178, .00384, .00069, .00021, .01075, .00438,
.00503, .0052, .00552, .00354, .00582, .00553,
.02371, .00944, .00799, .00475, .00635, .00556,
.00604, .00493, .01226, .00329, .00356, .00308,
.00185, .00178, .00267, .00521, .02048, .00856,
.00541, .00527, .00644, .0063, .00562, .00377,
.0061, .00178, .0011, .00048, .00014, 2*.00007,
.0013, .00767, .00116, .00096, .00158, .00788,
.00795, .00349, .00151, 144*0,
DMM=150, DMA=1550,
FFORI=0.5, FFORP=0.5, FHAYI=0.5, FHAYP=0.5,
FPR=320,1400,230,
IPOP =
572, 286, 401, 515, 221, 3178,
6078, 4842, 7011, 7959, 9705, 9708,
1145, 286, 1603, 1288, 221, 4073,
6789, 9505, 12220, 14591, 15101, 15552,
1145, 1288, 1402, 258, 779, 4073,
6789, 9505, 12220, 13210, 12551, 14482,
1145, 1431, 1202, 1545, 221, 883,
1472, 3921, 8870, 14092, 15611, 16542,
572, 1431, 2003, 258, 221, 883,
1472, 2060, 2649, 3238, 5900, 8403,
572, 1431, 2003, 773, 221, 883,
1472, 2060, 2649, 3238, 3826, 4415,
572, 143, 21, 26, 221, 883,
1472, 2060, 2707, 3677, 4761, 6404,
916, 215, 21, 26, 221, 883,
1472, 2060, 3296, 4995, 5904, 6812,
286, 143, 200, 26, 221, 883,
1472, 2060, 2721, 4995, 5904, 6812,
12, 15, 21, 26, 221, 883,
2068, 3870, 3656, 4995, 5904, 6812,
12, 15, 21, 26, 221, 1360,
3460, 4844, 6143, 6304, 6368, 6812,
12, 15, 21, 26, 370, 2076,
3460, 4844, 4789, 4665, 4838, 5162,
114, 15, 21, 26, 519, 2076,
3460, 4844, 2809, 3214, 3798, 4382,
114, 15, 21, 26, 519, 2009,
2904, 3677, 4427, 4092, 3798, 4382,
229, 15, 21, 44, 519, 1476,
2348, 3287, 4226, 5166, 5841, 6384,
286, 15, 21, 26, 260, 1409,
2348, 3287, 4226, 6121, 7718, 7256,
PAJUST=10*1,
IADD=8,
XRECEP=
0.989, 1.338, 0,
1.467, 0.114, 0,
1.012,-1.269, 0,
0.182,-2.607, 0,
-3.184, 1.269, 0,
-2.274,-0.08, 0,
-4.434,-1.464, 0,
-6.333, 1.978, 0,

```

```

NSTEP=2,TSTART=1997,TSTEP=10,10,8*0,
ACTRAT=2.5,
IPSOL=3*3,4*2,
PTSZ=1.5,3.0,7.7,54.0,0.3,
PTSFZFC=0.0,1.0,2*0.0,1.0,5*0.0,0.3,0.7,
&END
SAMPLE ISL FACILITY          GENERIC MET STATION
Yellowcake Dryer
Plant IX- Radon
Settling Pond P1
Satellite Facility
Settling Pond P2
New Wellfield 1
Prod. Wellfield 2
Prod. Wellfield 3
Rest. Wellfield 4
Irrigation Plot
Resident 1
Resident 2
Resident 3
Resident 4
Grazing Area 5
Resident 6
Resident 7
Resident 8
10-Year Action Period
10-Year Restoration
&NWAREA
NEX=0, NAS = 3, NNODE = 8,
NODE= 8,3,1,2, 7,4,8,3, 6,5,7,4,
XS = -0.776E3, -0.547E3, -0.466E3, -0.520E3,
      -0.669E3, -0.830E3, -0.952E3, -0.911E3,
YS = -1.354E3, -1.368E3, -1.556E3, -1.772E3,
      -1.839E3, -1.825E3, -1.704E3, -1.448E3,
&END

```

Attachment II:

MILDOS-AREA Output File for Sample ISL Site

TABLE OF CONTENTS

METEOROLOGICAL DATA	2
INDIVIDUAL RECEPTORS & MISCELLANEOUS INPUT DATA	3
POPULATION DISTRIBUTION	4
FINITE-ELEMENT DATA FOR SOURCE 6001	5
SOURCE PARAMETERS	6
DOSE CONVERSION FACTORS	7
TIME STEP 1, 10-Year Action Perio	
CONCENTRATION DATA FOR SPATIAL INTERVALS	12
ANNUAL POPULATION DOSE COMMITMENTS, PERSON-REM PER YEAR	
POPULATION DOSE SUMMARY	16
INDIVIDUAL RECEPTOR PARTICULATE CONCENTRATIONS	17
INDIVIDUAL RECEPTOR RADON AND RADON DAUGHTER CONCENTRATIONS	18
INDIVIDUAL RECEPTOR ALC CHECK AND/OR ANNUAL DOSE COMMITMENTS	19
TIME STEP 2, 10-Year Restoration	
CONCENTRATION DATA FOR SPATIAL INTERVALS	23
ANNUAL POPULATION DOSE COMMITMENTS, PERSON-REM PER YEAR	
POPULATION DOSE SUMMARY	27
INDIVIDUAL RECEPTOR PARTICULATE CONCENTRATIONS	28
INDIVIDUAL RECEPTOR RADON AND RADON DAUGHTER CONCENTRATIONS	29
INDIVIDUAL RECEPTOR ALC CHECK AND/OR ANNUAL DOSE COMMITMENTS	30

REGION: SAMPLE ISL FACILITY
METSET: GENERIC MET STATION

CODE: MILDOS-AREA (02/97)
DATA: sampisl.dat

PAGE 2
03/14/97

JOINT FREQUENCY IN PERCENT, DIRECTION INDICATES WHERE WIND IS FROM FREQWS=0.19110,0.24865,0.28024,0.23216,0.04119,0.00680
MPH N NNE NE ENE E ESE SE SSE S SSW SW WSW W WNW NW NNW TOTALS

STABILITY CLASS 1

1.5	0.0380	0.0110	0.0210	0.0090	0.0180	0.0130	0.0130	0.0060	0.0270	0.0060	0.0060	0.0090	0.0060	0.0100	0.0060	0.0100	0.2090
5.5	0.0210	0.0270	0.0270	0.0210	0.0210	0.0070	0.0070	0.0140	0.0410	0.0140	0.0140	0.0210	0.0140	0.0000	0.0140	0.0000	0.2630
10.0	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
15.5	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
21.5	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
28.0	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
ALL	0.0590	0.0380	0.0480	0.0300	0.0390	0.0200	0.0200	0.0200	0.0680	0.0200	0.0200	0.0300	0.0200	0.0100	0.0200	0.0100	0.4720

STABILITY CLASS 2

1.5	0.1810	0.1150	0.1400	0.1580	0.1680	0.0600	0.1280	0.0950	0.3610	0.1760	0.0680	0.0960	0.0930	0.0580	0.1070	0.0560	2.0600
5.5	0.1990	0.1030	0.1510	0.1160	0.0820	0.0620	0.0820	0.1230	0.2530	0.1230	0.1100	0.0820	0.1580	0.0550	0.1030	0.0890	1.8910
10.0	0.0820	0.0820	0.0550	0.0550	0.0210	0.0070	0.0340	0.0750	0.1990	0.0410	0.0620	0.0410	0.0480	0.0690	0.0550	0.0270	0.9530
15.5	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
21.5	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
28.0	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
ALL	0.4620	0.3000	0.3460	0.3290	0.2710	0.1290	0.2440	0.2930	0.8130	0.3400	0.2400	0.2190	0.2990	0.1820	0.2650	0.1720	4.9040

STABILITY CLASS 3

1.5	0.0680	0.0530	0.0670	0.0520	0.0600	0.0320	0.0620	0.0740	0.1710	0.0680	0.0560	0.0340	0.0280	0.0290	0.0590	0.0280	0.9410
5.5	0.3290	0.2190	0.2060	0.0960	0.0960	0.0620	0.1100	0.0890	0.5140	0.2120	0.0690	0.0750	0.1510	0.1030	0.0890	0.0890	2.5090
10.0	0.4040	0.2530	0.2330	0.1370	0.0480	0.0070	0.0550	0.2810	1.0620	0.2880	0.1030	0.1160	0.4110	0.3770	0.3150	0.1850	4.2750
15.5	0.0270	0.0270	0.0340	0.0270	0.0000	0.0000	0.0000	0.0690	0.2260	0.0140	0.0210	0.0210	0.1160	0.1580	0.0750	0.0210	0.8360
21.5	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0070	0.0210	0.0070	0.0000	0.0350
28.0	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
ALL	0.8280	0.5520	0.5400	0.3120	0.2040	0.1010	0.2270	0.5130	1.9730	0.5820	0.2490	0.2460	0.7130	0.6880	0.5450	0.3230	8.5960

STABILITY CLASS 4

1.5	0.7090	0.3080	0.3320	0.2960	0.2600	0.1690	0.2200	0.2290	0.7300	0.1970	0.2100	0.1290	0.1750	0.1360	0.1800	0.1660	4.4460
5.5	2.0280	0.8490	0.6920	0.3770	0.2330	0.1990	0.3970	0.5140	2.1240	0.6170	0.3770	0.3560	0.4660	0.4110	0.5000	0.5070	10.6470
10.0	2.0410	1.1030	0.5270	0.2600	0.1300	0.1030	0.3490	1.0480	5.7470	1.1780	0.4320	0.4860	1.6710	1.6300	1.0750	0.6920	18.4720
15.5	0.8360	0.8490	0.6300	0.1580	0.0270	0.0410	0.1510	0.8700	5.4390	1.2120	0.1850	0.3220	3.2130	5.5560	2.4660	0.4250	22.3800
21.5	0.0750	0.0620	0.0410	0.0070	0.0000	0.0070	0.0000	0.0550	0.4590	0.1230	0.0140	0.0270	0.6990	1.9320	0.5210	0.0620	4.0840
28.0	0.0000	0.0000	0.0070	0.0000	0.0000	0.0000	0.0000	0.0000	0.0140	0.0000	0.0000	0.0070	0.1780	0.3840	0.0690	0.0210	0.6800
ALL	5.6890	3.1710	2.2290	1.0980	0.6500	0.5190	1.1170	2.7160	14.5130	3.3270	1.2180	1.3270	6.4020	10.0490	4.8110	1.8730	60.7090

STABILITY CLASS 5

1.5	1.0750	0.4380	0.5030	0.5200	0.5520	0.3540	0.5820	0.5530	2.3710	0.9440	0.7990	0.4750	0.6350	0.5560	0.6040	0.4930	11.4540
5.5	1.2260	0.3290	0.3560	0.3080	0.1850	0.1780	0.2670	0.5210	2.0480	0.8560	0.5410	0.5270	0.6440	0.6300	0.5620	0.3770	9.5550
10.0	0.6100	0.1780	0.1100	0.0480	0.0140	0.0070	0.0070	0.1300	0.7670	0.1160	0.0960	0.1580	0.7880	0.7950	0.3490	0.1510	4.3240
15.5	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
21.5	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
28.0	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
ALL	2.9110	0.9450	0.9690	0.8760	0.7510	0.5390	0.8560	1.2040	5.1860	1.9160	1.4360	1.1600	2.0670	1.9810	1.5150	1.0210	25.3330

STABILITY CLASS 6

1.5	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
5.5	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
10.0	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
15.5	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000

21.5	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
28.0	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
ALL	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000

ALL	9.9490	5.0060	4.1320	2.6450	1.9150	1.3080	2.4640	4.7460	22.5530	6.1850	3.1630	2.9820	9.5010	12.9100	7.1560	3.3990	100.0140	

REGION: SAMPLE ISL FACILITY
 METSET: GENERIC MET STATION

CODE: MILDOS-AREA (02/97)
 DATA: sampisl.dat

PAGE 3
 03/14/97

```
-----INDIVIDUAL RECEPTOR LOCATION DATA, 8 LOCATIONS INPUT THIS RUN-----
 I      LOCATION NAMES      X(KM)  Y(KM)  Z(M)  DIST(KM)  TYPE      I      LOCATION NAMES      X(KM)  Y(KM)  Z(M)  DIST(KM)  TYPE
-----
```

I	LOCATION NAMES	X(KM)	Y(KM)	Z(M)	DIST(KM)	TYPE	I	LOCATION NAMES	X(KM)	Y(KM)	Z(M)	DIST(KM)	TYPE
1	Resident 1	0.99	1.34	0.00	1.66	0	5	Grazing Area 5	-3.18	1.27	0.00	3.43	0
2	Resident 2	1.47	0.11	0.00	1.47	0	6	Resident 6	-2.27	-0.08	0.00	2.28	0
3	Resident 3	1.01	-1.27	0.00	1.62	0	7	Resident 7	-4.43	-1.46	0.00	4.67	0
4	Resident 4	0.18	-2.61	0.00	2.61	0	8	Resident 8	-6.33	1.98	0.00	6.63	0

```
-----
```

MISCELLANEOUS INPUTABLE PARAMETER VALUES

```
-----
```

DMM	DMA	TSTART	FFORI	FHAYI	FFORP	FHAYP	FPR(1)	FPR(2)	FPR(3)	ACTRAT
150.0	1550.0	1997.00	0.50	0.50	0.50	0.50	320.00	1400.00	230.00	2.50

```
-----
```

IPACT EQUALS 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 1,

JC EQUALS 1, 0, 1, 0, 0, 1, 1, 0, 1, 0

```
TIME STEP DATA... STEP NAMES LENGTH, YRS IFTODO
```

STEP	NAMES	LENGTH, YRS	IFTODO
1	10-Year Action Perio	10.00	1
2	10-Year Restoration	10.00	1

XRHO EQUALS 1.5, 2.5, 3.5, 4.5, 7.5, 15.0, 25.0, 35.0, 45.0, 55.0, 65.0, 75.0,

HDP EQUALS 50.0

REGION: SAMPLE ISL FACILITY
 METSET: GENERIC MET STATION

CODE: MILDOS-AREA (02/97)
 DATA: sampisl.dat

PAGE 4
 03/14/97

POPULATION DISTRIBUTION

KILOMETERS	N 0.0	NNE 22.5	NE 45.0	ENE 67.5	E 90.0	ESE 112.5	SE 135.0	SSE 157.5	S 180.0	SSW 202.5	SW 225.0	WSW 247.5	W 270.0	WNW 292.5	NW 315.0	NNW 337.5
1.0- 2.0	572	1145	1145	1145	572	572	572	916	286	12	12	12	114	114	229	286
2.0- 3.0	286	286	1288	1431	1431	1431	143	215	143	15	15	15	15	15	15	15
3.0- 4.0	401	1603	1402	1202	2003	2003	21	21	200	21	21	21	21	21	21	21
4.0- 5.0	515	1288	258	1545	258	773	26	26	26	26	26	26	26	26	44	26
5.0-10.0	221	221	779	221	221	221	221	221	221	221	221	370	519	519	519	260
10.0-20.0	3178	4073	4073	883	883	883	883	883	883	883	1360	2076	2076	2009	1476	1409
20.0-30.0	6078	6789	6789	1472	1472	1472	1472	1472	1472	2068	3460	3460	3460	2904	2348	2348
30.0-40.0	4842	9505	9505	3921	2060	2060	2060	2060	2060	3870	4844	4844	4844	3677	3287	3287
40.0-50.0	7011	12220	12220	8870	2649	2649	2707	3296	2721	3656	6143	4789	2809	4427	4226	4226
50.0-60.0	7959	14591	13210	14092	3238	3238	3677	4995	4995	4995	6304	4665	3214	4092	5166	6121
60.0-70.0	9705	15101	12551	15611	5900	3826	4761	5904	5904	5904	6368	4838	3798	3798	5841	7718
70.0-80.0	9708	15552	14482	16542	8403	4415	6404	6812	6812	6812	6812	5162	4382	4382	6384	7256
1.0-80.0	50476	82374	77702	66935	29090	23543	22947	26821	25723	28483	35586	30278	25278	25984	29556	32973

TOTAL 1-80 KM POPULATION IS 613749 PERSONS

REGION: SAMPLE ISL FACILITY
METSET: GENERIC MET STATION

CODE: MILDOS-AREA (02/97)
DATA: sampisl.dat

PAGE 5
03/14/97

FINITE ELEMENT DATA FOR SOURCE NO. 10: IPX= 1 ID= 6001

AREA SOURCE ELEMENT NO. =	1	NODES=	8	3	1	2
AREA SOURCE ELEMENT NO. =	2	NODES=	7	4	8	3
AREA SOURCE ELEMENT NO. =	3	NODES=	6	5	7	4

NODAL COORDINATES (M):

NODE NO. =	1	XS=	-7.7600E+02	YS=	-1.3540E+03
NODE NO. =	2	XS=	-5.4700E+02	YS=	-1.3680E+03
NODE NO. =	3	XS=	-4.6600E+02	YS=	-1.5560E+03
NODE NO. =	4	XS=	-5.2000E+02	YS=	-1.7720E+03
NODE NO. =	5	XS=	-6.6900E+02	YS=	-1.8390E+03
NODE NO. =	6	XS=	-8.3000E+02	YS=	-1.8250E+03
NODE NO. =	7	XS=	-9.5200E+02	YS=	-1.7040E+03
NODE NO. =	8	XS=	-9.1100E+02	YS=	-1.4480E+03

NUMBER OF SOURCES=10

NO.	KM X	KM Y	M Z	KM2 AREA	U-238	Th-230	CI/YEAR Ra-226	Pb-210	Rn-222	ID	PSIZE SET	M/SEC EXIT VEL	SOURCE NAME
1	0.00	0.00	20.00	0.0000	1.46E-01	7.30E-04	7.30E-04	7.30E-04	0.00E+00	1101	1	1.70E+01	Yellowcake Dryer
2	0.00	0.00	0.00	0.0000	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.90E+00	1102	1	0.00E+00	Plant IX- Radon
3	-0.34	-0.09	0.00	0.0000	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.53E+02	1203	1	0.00E+00	Settling Pond P1
4	-6.63	-0.38	0.00	0.0000	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.90E+00	1304	1	0.00E+00	Satellite Facility
5	-6.71	-0.60	0.00	0.0000	0.00E+00	0.00E+00	0.00E+00	0.00E+00	6.40E+01	1305	1	0.00E+00	Settling Pond P2
6	-7.00	1.20	0.00	0.0600	0.00E+00	0.00E+00	0.00E+00	0.00E+00	2.70E-02	2001	3	0.00E+00	New Wellfield 1
7	-5.30	-1.30	0.00	0.0500	0.00E+00	0.00E+00	0.00E+00	0.00E+00	4.90E+01	2002	3	0.00E+00	Prod. Wellfield 2
8	-1.20	0.30	0.00	0.0550	0.00E+00	0.00E+00	0.00E+00	0.00E+00	9.30E+01	2003	3	0.00E+00	Prod. Wellfield 3
9	-0.23	0.50	0.00	0.1000	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.10E+02	2004	3	0.00E+00	Rest. Wellfield 4
10	-0.78	-1.35	0.00	0.1853	9.12E-03	3.76E-05	2.32E-04	2.32E-04	7.60E+00	6001	3	0.00E+00	Irrigation Plot

INPUT TAILS ACTIVITIES, PCI/G

SET	URANIUM	THORIUM	RADIUM	LEAD
1	5.10E+01	2.10E-01	1.30E+00	1.30E+00
2	0.00E+00	0.00E+00	0.00E+00	0.00E+00
3	0.00E+00	0.00E+00	0.00E+00	0.00E+00

AMAD AND FRACTIONAL DISTRIBUTION

SET	1.5	3.0	7.7	54.0
1	0.000	1.000	0.000	0.000
2	1.000	0.000	0.000	0.000
3	0.000	0.000	0.300	0.700

PARTICULATE SOURCE STRENGTH MULTIPLIERS BY TIME STEP, 2 TIME STEP(S) USED FOR THIS RUN

SOURCE NUMBER	TSTEP 1 10.00YRS	TSTEP 2 10.00YRS	TSTEP 3 0.00YRS	TSTEP 4 0.00YRS	TSTEP 5 0.00YRS	TSTEP 6 0.00YRS	TSTEP 7 0.00YRS	TSTEP 8 0.00YRS	TSTEP 9 0.00YRS	TSTEP10 0.00YRS
1	1.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
2	1.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
3	1.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
4	1.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
5	1.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
6	1.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
7	1.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
8	1.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
9	1.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
10	1.000E+00	1.000E+00	1.000E+00	1.000E+00	1.000E+00	1.000E+00	1.000E+00	1.000E+00	1.000E+00	1.000E+00

RADON SOURCE STRENGTH MULTIPLIERS BY TIME STEP, 2 TIME STEP(S) USED FOR THIS RUN

SOURCE NUMBER	TSTEP 1 10.00YRS	TSTEP 2 10.00YRS	TSTEP 3 0.00YRS	TSTEP 4 0.00YRS	TSTEP 5 0.00YRS	TSTEP 6 0.00YRS	TSTEP 7 0.00YRS	TSTEP 8 0.00YRS	TSTEP 9 0.00YRS	TSTEP10 0.00YRS
1	1.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
2	1.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
3	1.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
4	1.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
5	1.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
6	1.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
7	1.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
8	1.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
9	1.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00

10 1.000E+00 1.000E+00 1.000E+00 1.000E+00 1.000E+00 1.000E+00 1.000E+00 1.000E+00 1.000E+00 1.000E+00

INHALATION DOSE CONVERSION FACTORS, MREM/YR PER PCI/M3, FOR AGE GROUP OF INFANT

AMAD= 1.5 µm	U-238	U-234	Th-230	Ra-226	Pb-210	Bi-210	Po-210
EFFECTIV	3.42E+03	3.85E+03	4.68E+03	6.49E+02	1.74E+02	4.10E+00	8.80E+02
BONE	4.84E+01	5.41E+01	2.17E+04	5.92E+02	5.47E+02	7.03E-02	2.10E+02
AVG.LUNG	2.69E+04	3.08E+04	3.10E+04	4.17E+03	5.07E+01	5.96E+01	3.36E+03
LIVER	3.51E-01	3.23E-01	1.16E+02	4.42E+01	2.83E+03	1.32E+00	2.54E+02
KIDNEY	4.67E+01	5.23E+01	1.21E+01	1.68E+01	1.08E+03	3.48E+01	1.32E+03
AMAD= 3.0 µm	U-238	U-234	Th-230	Ra-226	Pb-210	Bi-210	Po-210
EFFECTIV	2.08E+03	2.33E+03	3.05E+03	4.63E+02	1.90E+02	3.25E+00	7.26E+02
BONE	3.56E+01	3.98E+01	1.57E+04	6.64E+02	5.94E+02	8.98E-02	2.37E+02
AVG.LUNG	1.70E+04	1.94E+04	1.96E+04	2.63E+03	5.51E+01	3.77E+01	2.12E+03
LIVER	2.48E-01	2.38E-01	8.41E+01	4.95E+01	3.08E+03	1.69E+00	2.88E+02
KIDNEY	3.44E+01	3.86E+01	8.73E+00	1.88E+01	1.16E+03	4.13E+01	1.49E+03
AMAD= 7.7 µm	U-238	U-234	Th-230	Ra-226	Pb-210	Bi-210	Po-210
EFFECTIV	1.11E+03	1.25E+03	1.85E+03	3.08E+02	2.28E+02	2.91E+00	7.61E+02
BONE	3.60E+01	4.02E+01	1.18E+04	8.37E+02	7.46E+02	1.27E-01	3.00E+02
AVG.LUNG	7.50E+03	8.38E+03	8.46E+03	1.14E+03	6.67E+01	1.78E+01	9.16E+02
LIVER	2.30E-01	2.47E-01	7.57E+01	6.37E+01	3.71E+03	2.30E+00	3.52E+02
KIDNEY	3.71E+01	4.20E+01	7.71E+00	2.51E+01	1.39E+03	5.34E+01	1.85E+03
AMAD=54.0 µm	U-238	U-234	Th-230	Ra-226	Pb-210	Bi-210	Po-210
EFFECTIV	2.49E+00	2.74E+00	5.25E+02	1.45E+02	2.17E+02	1.82E+00	4.98E+02
BONE	2.04E+01	2.28E+01	6.11E+03	7.79E+02	7.13E+02	1.40E-01	2.66E+02
AVG.LUNG	0.00E+00	0.00E+00	0.00E+00	0.00E+00	6.38E+01	0.00E+00	0.00E+00
LIVER	1.09E-01	1.40E-01	3.92E+01	5.93E+01	3.55E+03	2.53E+00	3.12E+02
KIDNEY	2.10E+01	2.38E+01	3.99E+00	2.34E+01	1.32E+03	4.75E+01	1.64E+03
AMAD= 0.3 µm	U-238	U-234	Th-230	Ra-226	Pb-210	Bi-210	Po-210
EFFECTIV	6.97E+03	7.81E+03	9.06E+03	1.18E+03	1.75E+02	6.52E+00	1.30E+03
BONE	8.37E+01	9.35E+01	4.21E+04	5.42E+02	5.39E+02	4.04E-02	1.75E+02
AVG.LUNG	5.84E+04	6.67E+04	6.73E+04	9.03E+03	5.00E+01	1.21E+02	7.29E+03
LIVER	6.15E-01	5.35E-01	2.06E+02	3.64E+01	2.80E+03	7.62E-01	1.98E+02
KIDNEY	7.63E+01	8.55E+01	2.12E+01	1.43E+01	1.09E+03	2.51E+01	1.10E+03

INHALATION DOSE CONVERSION FACTORS, MREM/YR PER PCI/M3, FOR AGE GROUP OF CHILD

AMAD= 1.5 µm	U-238	U-234	Th-230	Ra-226	Pb-210	Bi-210	Po-210
EFFECTIV	1.64E+03	1.84E+03	2.58E+03	1.62E+02	8.37E+01	1.97E+00	2.05E+02
BONE	3.23E+01	3.60E+01	1.91E+04	1.86E+02	4.00E+02	5.14E-02	2.27E+01
AVG. LUNG	1.32E+04	1.47E+04	1.49E+04	1.18E+03	2.30E+01	2.70E+01	9.53E+02
LIVER	1.62E-01	1.46E-01	6.50E+01	9.12E+00	1.18E+03	5.53E-01	6.00E+01
KIDNEY	2.04E+01	2.29E+01	7.00E+00	4.42E+00	4.98E+02	1.61E+01	3.19E+02
AMAD= 3.0 µm	U-238	U-234	Th-230	Ra-226	Pb-210	Bi-210	Po-210
EFFECTIV	9.97E+02	1.12E+03	1.68E+03	1.16E+02	9.11E+01	1.56E+00	1.69E+02
BONE	2.38E+01	2.66E+01	1.38E+04	2.09E+02	4.35E+02	6.57E-02	2.57E+01
AVG. LUNG	8.32E+03	9.31E+03	9.39E+03	7.45E+02	2.50E+01	1.71E+01	6.01E+02
LIVER	1.14E-01	1.08E-01	4.70E+01	1.02E+01	1.29E+03	7.07E-01	6.78E+01
KIDNEY	1.51E+01	1.69E+01	5.07E+00	4.95E+00	5.37E+02	1.91E+01	3.61E+02
AMAD= 7.7 µm	U-238	U-234	Th-230	Ra-226	Pb-210	Bi-210	Po-210
EFFECTIV	5.33E+02	5.97E+02	9.93E+02	6.72E+01	1.10E+02	1.40E+00	1.56E+02
BONE	1.46E+01	1.51E+01	8.90E+03	2.43E+02	4.88E+02	8.34E-02	3.00E+01
AVG. LUNG	3.59E+03	4.02E+03	4.05E+03	3.22E+02	2.76E+01	7.36E+00	2.60E+02
LIVER	7.77E-02	8.02E-02	3.31E+01	1.24E+01	1.47E+03	9.15E-01	7.97E+01
KIDNEY	1.14E+01	1.28E+01	3.59E+00	5.99E+00	6.14E+02	2.35E+01	4.26E+02
AMAD=54.0 µm	U-238	U-234	Th-230	Ra-226	Pb-210	Bi-210	Po-210
EFFECTIV	1.19E+00	1.31E+00	2.81E+02	3.15E+01	1.04E+02	8.77E-01	1.02E+02
BONE	8.28E+00	8.54E+00	4.61E+03	2.26E+02	4.67E+02	9.15E-02	2.66E+01
AVG. LUNG	0.00E+00	0.00E+00	0.00E+00	0.00E+00	2.64E+01	0.00E+00	0.00E+00
LIVER	3.67E-02	4.54E-02	1.71E+01	1.15E+01	1.41E+03	1.00E+00	7.07E+01
KIDNEY	6.46E+00	7.24E+00	1.86E+00	5.58E+00	5.82E+02	2.09E+01	3.78E+02
AMAD= 0.3 µm	U-238	U-234	Th-230	Ra-226	Pb-210	Bi-210	Po-210
EFFECTIV	3.34E+03	3.74E+03	5.00E+03	3.06E+02	8.76E+01	3.26E+00	3.24E+02
BONE	6.17E+01	6.89E+01	3.71E+04	1.77E+02	4.09E+02	3.06E-02	2.01E+01
AVG. LUNG	2.86E+04	3.20E+04	3.22E+04	2.56E+03	2.33E+01	5.66E+01	2.07E+03
LIVER	3.07E-01	2.68E-01	1.26E+02	8.39E+00	1.24E+03	3.39E-01	5.29E+01
KIDNEY	3.91E+01	4.38E+01	1.36E+01	3.92E+00	5.12E+02	1.18E+01	2.80E+02

INHALATION DOSE CONVERSION FACTORS, MREM/YR PER PCI/M3, FOR AGE GROUP OF TEENAGE

AMAD= 1.5 µm	U-238	U-234	Th-230	Ra-226	Pb-210	Bi-210	Po-210
EFFECTIV	8.55E+02	9.62E+02	1.77E+03	9.20E+01	9.06E+01	2.13E+00	9.38E+01
BONE	4.15E+01	4.63E+01	1.97E+04	7.02E+02	9.58E+02	1.23E-01	1.46E+01
AVG. LUNG	6.88E+03	7.69E+03	7.76E+03	5.21E+02	9.51E+00	1.12E+01	4.20E+02
LIVER	8.43E-02	7.30E-02	3.76E+01	5.30E+00	5.07E+02	2.37E-01	2.73E+01
KIDNEY	1.17E+01	1.31E+01	4.28E+00	5.89E+00	2.39E+02	7.74E+00	1.65E+02
AMAD= 3.0 µm	U-238	U-234	Th-230	Ra-226	Pb-210	Bi-210	Po-210
EFFECTIV	5.20E+02	5.83E+02	1.16E+03	6.56E+01	9.87E+01	1.69E+00	7.74E+01
BONE	3.06E+01	3.41E+01	1.43E+04	7.87E+02	1.04E+03	1.57E-01	1.65E+01
AVG. LUNG	4.34E+03	4.85E+03	4.90E+03	3.29E+02	1.03E+01	7.06E+00	2.65E+02
LIVER	5.95E-02	5.38E-02	2.72E+01	5.94E+00	5.51E+02	3.03E-01	3.08E+01
KIDNEY	8.61E+00	9.64E+00	3.10E+00	6.60E+00	2.58E+02	9.18E+00	1.87E+02
AMAD= 7.7 µm	U-238	U-234	Th-230	Ra-226	Pb-210	Bi-210	Po-210
EFFECTIV	2.78E+02	3.12E+02	6.62E+02	5.88E+01	1.10E+02	1.40E+00	7.18E+01
BONE	2.47E+01	2.77E+01	9.08E+03	9.49E+02	1.22E+03	2.08E-01	2.03E+01
AVG. LUNG	1.87E+03	2.09E+03	2.11E+03	1.42E+02	1.24E+01	3.30E+00	1.15E+02
LIVER	3.89E-02	3.86E-02	1.73E+01	7.11E+00	6.61E+02	4.10E-01	3.75E+01
KIDNEY	6.18E+00	6.92E+00	1.97E+00	8.61E+00	3.07E+02	1.18E+01	2.27E+02
AMAD=54.0 µm	U-238	U-234	Th-230	Ra-226	Pb-210	Bi-210	Po-210
EFFECTIV	6.22E-01	6.85E-01	1.88E+02	2.76E+01	1.04E+02	8.77E-01	4.70E+01
BONE	1.40E+01	1.57E+01	4.70E+03	8.83E+02	1.17E+03	2.29E-01	1.80E+01
AVG. LUNG	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.18E+01	0.00E+00	0.00E+00
LIVER	1.83E-02	2.19E-02	8.98E+00	6.62E+00	6.32E+02	4.50E-01	3.33E+01
KIDNEY	3.50E+00	3.92E+00	1.02E+00	8.02E+00	2.91E+02	1.05E+01	2.02E+02
AMAD= 0.3 µm	U-238	U-234	Th-230	Ra-226	Pb-210	Bi-210	Po-210
EFFECTIV	1.74E+03	1.95E+03	3.44E+03	1.58E+02	8.76E+01	3.26E+00	1.48E+02
BONE	7.49E+01	8.37E+01	3.83E+04	6.46E+02	1.01E+03	7.54E-02	1.27E+01
AVG. LUNG	1.49E+04	1.67E+04	1.68E+04	1.13E+03	9.99E+00	2.42E+01	9.11E+02
LIVER	1.54E-01	1.28E-01	6.64E+01	4.76E+00	5.33E+02	1.45E-01	2.48E+01
KIDNEY	2.05E+01	2.29E+01	7.56E+00	4.76E+00	2.56E+02	5.91E+00	1.50E+02

INHALATION DOSE CONVERSION FACTORS, MREM/YR PER PCI/M3, FOR AGE GROUP OF ADULT

AMAD= 1.5 µm	U-238	U-234	Th-230	Ra-226	Pb-210	Bi-210	Po-210
EFFECTIV	7.13E+02	8.02E+02	1.61E+03	5.41E+01	6.97E+01	1.64E+00	5.87E+01
BONE	2.30E+01	2.57E+01	1.97E+04	2.19E+02	5.64E+02	7.24E-02	5.82E+00
AVG.LUNG	5.73E+03	6.41E+03	6.47E+03	3.47E+02	7.92E+00	9.32E+00	2.80E+02
LIVER	7.03E-02	6.09E-02	3.42E+01	2.94E+00	4.23E+02	1.97E-01	1.82E+01
KIDNEY	9.73E+00	1.09E+01	3.89E+00	2.94E+00	1.99E+02	6.45E+00	1.10E+02

AMAD= 3.0 µm	U-238	U-234	Th-230	Ra-226	Pb-210	Bi-210	Po-210
EFFECTIV	4.34E+02	4.85E+02	1.05E+03	3.86E+01	7.59E+01	1.30E+00	4.84E+01
BONE	1.70E+01	1.90E+01	1.43E+04	2.46E+02	6.12E+02	9.26E-02	6.58E+00
AVG.LUNG	3.62E+03	4.05E+03	4.08E+03	2.19E+02	8.61E+00	5.88E+00	1.77E+02
LIVER	4.96E-02	4.48E-02	2.47E+01	3.30E+00	4.59E+02	2.52E-01	2.05E+01
KIDNEY	7.17E+00	8.03E+00	2.81E+00	3.30E+00	2.15E+02	7.65E+00	1.25E+02

AMAD= 7.7 µm	U-238	U-234	Th-230	Ra-226	Pb-210	Bi-210	Po-210
EFFECTIV	2.32E+02	2.60E+02	6.62E+02	2.80E+01	8.45E+01	1.08E+00	4.23E+01
BONE	1.12E+01	1.26E+01	9.08E+03	2.79E+02	6.78E+02	1.16E-01	7.51E+00
AVG.LUNG	1.56E+03	1.75E+03	1.76E+03	9.46E+01	9.53E+00	2.54E+00	7.63E+01
LIVER	2.99E-02	2.97E-02	1.58E+01	3.74E+00	5.08E+02	3.16E-01	2.34E+01
KIDNEY	4.75E+00	5.32E+00	1.79E+00	3.74E+00	2.36E+02	9.04E+00	1.42E+02

AMAD=54.0 µm	U-238	U-234	Th-230	Ra-226	Pb-210	Bi-210	Po-210
EFFECTIV	5.18E-01	5.71E-01	1.88E+02	1.31E+01	8.03E+01	6.75E-01	2.77E+01
BONE	6.37E+00	7.12E+00	4.70E+03	2.60E+02	6.48E+02	1.27E-01	6.66E+00
AVG.LUNG	0.00E+00	0.00E+00	0.00E+00	0.00E+00	9.11E+00	0.00E+00	0.00E+00
LIVER	1.41E-02	1.68E-02	8.16E+00	3.49E+00	4.86E+02	3.46E-01	2.08E+01
KIDNEY	2.69E+00	3.01E+00	9.29E-01	3.49E+00	2.24E+02	8.05E+00	1.26E+02

AMAD= 0.3 µm	U-238	U-234	Th-230	Ra-226	Pb-210	Bi-210	Po-210
EFFECTIV	1.45E+03	1.63E+03	3.12E+03	9.86E+01	7.30E+01	2.72E+00	9.27E+01
BONE	4.41E+01	4.92E+01	3.83E+04	2.09E+02	5.92E+02	4.44E-02	5.29E+00
AVG.LUNG	1.24E+04	1.39E+04	1.40E+04	7.53E+02	8.33E+00	2.02E+01	6.07E+02
LIVER	1.40E-01	1.16E-01	6.64E+01	2.80E+00	4.44E+02	1.21E-01	1.65E+01
KIDNEY	1.86E+01	2.08E+01	7.56E+00	2.80E+00	2.13E+02	4.93E+00	1.00E+02

EXTERNAL WHOLE BODY DOSE CONVERSION FACTORS

	U-238	Th-230	Ra-226	Pb-210	Rn-222	Po-218	Pb-214	Bi-214
GROUND, MR/YR PER PCI/M2	3.70E-06	6.12E-07	9.47E-07	2.27E-06	5.03E-08	1.10E-08	3.16E-05	1.85E-04
CLOUD, MR/YR PER PCI/M3	1.23E-04	3.59E-06	4.90E-05	1.43E-05	2.83E-06	6.34E-07	1.67E-03	1.16E-02
WORKING LEVEL CONCENTRATION FACTORS, WL PER PCI/M3	1.03E-06	5.07E-06	3.73E-06

INGESTION DOSE CONVERSION FACTORS, MREM PER PCI INGESTED

AGE GROUP	TISSUE	U-238	U-234	Th-234	Th-230	Ra-226	Pb-210	Bi-210	Po-210
INFANT	EFFECTIV	1.61E-02	1.79E-02	8.57E-04	2.51E-02	2.11E-02	3.11E-02	3.88E-05	7.95E-02
INFANT	BONE	4.49E-02	5.43E-02	9.24E-07	4.39E-02	1.09E-01	1.86E-01	6.00E-07	3.29E-02
INFANT	LIVER	2.72E-04	3.15E-04	4.93E-07	3.74E-03	8.48E-03	3.62E-01	7.52E-06	4.48E-02
INFANT	KIDNEY	4.93E-02	5.71E-02	4.38E-07	3.53E-04	3.32E-03	1.35E-01	2.86E-04	2.23E-01
CHILD	EFFECTIV	9.95E-04	1.14E-03	5.30E-05	1.53E-03	2.38E-03	8.67E-03	1.08E-05	9.12E-03
CHILD	BONE	4.86E-03	5.43E-03	1.00E-07	3.32E-03	2.50E-02	7.86E-02	2.53E-07	2.07E-03
CHILD	LIVER	3.74E-05	4.20E-05	6.78E-08	1.45E-04	1.32E-03	8.81E-02	1.83E-06	6.88E-03
CHILD	KIDNEY	6.01E-03	6.75E-03	5.34E-08	1.54E-05	6.44E-04	3.54E-02	7.48E-05	3.44E-02
TEENAGE	EFFECTIV	7.90E-04	8.80E-04	4.22E-05	1.20E-03	4.22E-03	1.12E-02	1.40E-05	4.85E-03
TEENAGE	BONE	1.83E-02	2.05E-02	3.77E-07	3.32E-03	1.09E-01	2.35E-01	7.57E-07	1.65E-03
TEENAGE	LIVER	2.13E-05	2.39E-05	3.85E-08	5.94E-05	8.14E-04	4.75E-02	9.87E-07	3.68E-03
TEENAGE	KIDNEY	3.85E-03	4.33E-03	3.43E-08	6.80E-06	1.02E-03	2.18E-02	4.62E-05	2.04E-02
ADULT	EFFECTIV	2.55E-04	2.84E-04	1.36E-05	5.46E-04	1.32E-03	5.10E-03	6.36E-06	1.94E-03
ADULT	BONE	3.74E-03	4.18E-03	7.70E-08	1.33E-03	2.53E-02	8.10E-02	2.61E-07	4.22E-04
ADULT	LIVER	8.51E-06	9.55E-06	1.54E-08	2.20E-05	3.39E-04	2.26E-02	4.70E-07	1.60E-03
ADULT	KIDNEY	1.54E-03	1.73E-03	1.37E-08	2.52E-06	3.39E-04	1.04E-02	2.20E-05	9.29E-03

ENVIRONMENTAL CONCENTRATION FACTORS						
CONCENTRATION FACTOR	FOOD TYPE	U-238	Th-230	Ra-226	Pb-210	
BIV, DIMENSIONLESS	ED.ABG.	2.50E-03	4.20E-03	1.40E-02	4.00E-03	
BIV, DIMENSIONLESS	POTATO	2.50E-03	4.20E-03	3.00E-03	4.00E-03	
BIV, DIMENSIONLESS	BELOW G.	2.50E-03	4.20E-03	1.40E-02	4.00E-03	
BIV, DIMENSIONLESS	FORAGE	2.50E-03	4.20E-03	1.80E-02	2.80E-02	
BIV, DIMENSIONLESS	ST. FEED	2.50E-03	4.20E-03	8.20E-02	3.60E-02	
FBI, PCI/KG PER PCI/DAY	MEAT	3.40E-04	2.00E-04	5.10E-04	7.10E-04	
FMI, PCI/L PER PCI/DAY	MILK	6.10E-04	5.00E-06	5.90E-04	1.20E-04	
FRACTION IN ED PORTION	ED.ABG.	1.00E+00	1.00E+00	1.00E+00	1.00E+00	
FRACTION IN ED PORTION	POTATO	1.00E-01	1.00E-01	1.00E-01	1.00E-01	
FRACTION IN ED PORTION	BELOW G.	1.00E-01	1.00E-01	1.00E-01	1.00E-01	
FRACTION IN ED PORTION	FORAGE	1.00E+00	1.00E+00	1.00E+00	1.00E+00	
FRACTION IN ED PORTION	ST. FEED	1.00E+00	1.00E+00	1.00E+00	1.00E+00	

TIME STEP DEPENDENT VARIABLES										
NO.	TIME STEP NAME	PAJUST	GFACT				TFACT			
			U-238	Th-230	Ra-226	Pb-210	U-238	Th-230	Ra-226	Pb-210
1	10-Year Action Perio	1.000E+00	2.947E+08	2.947E+08	2.941E+08	2.542E+08	1.624E+00	1.624E+00	1.624E+00	1.620E+00
2	10-Year Restoration	1.000E+00	2.947E+08	2.947E+08	2.941E+08	2.542E+08	1.624E+00	1.624E+00	1.624E+00	1.620E+00

XPFACT=2.640E+02 GPFACT(4)=1.707E+09 1.707E+09 1.679E+09 6.943E+08 TPFAC(4)=1.638E+00 1.638E+00 1.638E+00 1.624E+00

TIME STEP NUMBER 1, 10-Year Action Perio DURATION IN YRS IS... 10.0

CONCENTRATION DATA FOR THE E DIRECTION, THETA EQUALS 90.0 DEGREES

XRHO, KM	TOTAL AIR CONCENTRATIONS, PCI/M3, AND WL									
	U-238	Th-230	Ra-226	Pb-210	Rn-222	Po-218	Pb-214	Bi-214	Pb-210	WL
1.5	4.257E-03	2.128E-05	2.133E-05	2.128E-05	8.309E+00	7.386E+00	3.171E+00	1.625E+00	2.639E-06	2.975E-05
2.5	2.266E-03	1.133E-05	1.137E-05	1.134E-05	4.365E+00	4.125E+00	2.190E+00	1.398E+00	3.325E-06	2.056E-05
3.5	1.400E-03	7.000E-06	7.062E-06	7.044E-06	2.829E+00	2.748E+00	1.652E+00	1.175E+00	3.811E-06	1.559E-05
4.5	9.516E-04	4.754E-06	4.843E-06	4.830E-06	2.032E+00	2.001E+00	1.308E+00	9.862E-01	4.123E-06	1.237E-05
7.5	4.085E-04	2.039E-06	2.116E-06	2.111E-06	1.028E+00	1.025E+00	7.768E-01	6.288E-01	4.484E-06	7.340E-06
15.0	1.166E-04	5.816E-07	6.169E-07	6.154E-07	3.985E-01	3.987E-01	3.527E-01	3.084E-01	4.297E-06	3.349E-06
25.0	4.356E-05	2.171E-07	2.334E-07	2.328E-07	1.948E-01	1.949E-01	1.856E-01	1.729E-01	3.864E-06	1.787E-06
35.0	2.259E-05	1.125E-07	1.220E-07	1.217E-07	1.212E-01	1.213E-01	1.188E-01	1.144E-01	3.535E-06	1.154E-06
45.0	1.383E-05	6.891E-08	7.514E-08	7.495E-08	8.461E-02	8.466E-02	8.397E-02	8.235E-02	3.274E-06	8.201E-07
55.0	9.352E-06	4.657E-08	5.110E-08	5.097E-08	6.336E-02	6.339E-02	6.326E-02	6.265E-02	3.064E-06	6.197E-07
65.0	6.742E-06	3.357E-08	3.696E-08	3.686E-08	4.960E-02	4.963E-02	4.968E-02	4.947E-02	2.886E-06	4.875E-07
75.0	5.088E-06	2.533E-08	2.797E-08	2.790E-08	4.010E-02	4.012E-02	4.023E-02	4.019E-02	2.733E-06	3.952E-07

XRHO, KM	GROUND SURFACE CONCENTRATIONS, PCI/M2									
	U-238	Th-230	Ra-226	Pb-210	Rn-222	Po-218	Pb-214	Bi-214	Pb-210	
1.5	7.737E+03	3.867E+01	3.892E+01	3.892E+01	0.000E+00	4.477E+01	4.477E+01	4.477E+01	2.013E+00	
2.5	4.121E+03	2.059E+01	2.081E+01	2.081E+01	0.000E+00	2.407E+01	2.407E+01	2.407E+01	2.536E+00	
3.5	2.556E+03	1.276E+01	1.317E+01	1.317E+01	0.000E+00	1.535E+01	1.535E+01	1.535E+01	2.906E+00	
4.5	1.748E+03	8.714E+00	9.302E+00	9.302E+00	0.000E+00	1.089E+01	1.089E+01	1.089E+01	3.144E+00	
7.5	7.577E+02	3.768E+00	4.248E+00	4.248E+00	0.000E+00	5.060E+00	5.060E+00	5.060E+00	3.419E+00	
15.0	2.177E+02	1.080E+00	1.272E+00	1.272E+00	0.000E+00	1.588E+00	1.588E+00	1.588E+00	3.277E+00	
25.0	8.127E+01	4.031E-01	4.790E-01	4.790E-01	0.000E+00	6.334E-01	6.334E-01	6.334E-01	2.947E+00	
35.0	4.205E+01	2.086E-01	2.479E-01	2.479E-01	0.000E+00	3.439E-01	3.439E-01	3.439E-01	2.696E+00	
45.0	2.569E+01	1.275E-01	1.511E-01	1.511E-01	0.000E+00	2.181E-01	2.181E-01	2.181E-01	2.497E+00	
55.0	1.734E+01	8.605E-02	1.020E-01	1.020E-01	0.000E+00	1.522E-01	1.522E-01	1.522E-01	2.337E+00	
65.0	1.248E+01	6.192E-02	7.309E-02	7.309E-02	0.000E+00	1.124E-01	1.124E-01	1.124E-01	2.201E+00	
75.0	9.399E+00	4.665E-02	5.487E-02	5.487E-02	0.000E+00	8.664E-02	8.664E-02	8.664E-02	2.084E+00	

XRHO, KM	TOTAL DEPOSITION RATES, PCI/M2-SEC			
	U-238	Th-230	Ra-226	Pb-210
1.5	4.263E-05	2.131E-07	2.149E-07	2.223E-07
2.5	2.271E-05	1.135E-07	1.149E-07	1.246E-07
3.5	1.409E-05	7.034E-08	7.273E-08	8.398E-08
4.5	9.631E-06	4.802E-08	5.137E-08	6.361E-08
7.5	4.175E-06	2.076E-08	2.346E-08	3.685E-08
15.0	1.200E-06	5.954E-09	7.023E-09	1.990E-08
25.0	4.478E-07	2.222E-09	2.645E-09	1.423E-08
35.0	2.317E-07	1.149E-09	1.369E-09	1.197E-08
45.0	1.416E-07	7.024E-10	8.341E-10	1.065E-08
55.0	9.557E-08	4.742E-10	5.633E-10	9.755E-09
65.0	6.876E-08	3.412E-10	4.036E-10	9.061E-09
75.0	5.179E-08	2.571E-10	3.030E-10	8.500E-09

TIME STEP NUMBER 1, 10-Year Action Perio DURATION IN YRS IS... 10.0

CONCENTRATION DATA FOR THE S DIRECTION, THETA EQUALS 180.0 DEGREES

XRHO, KM	TOTAL AIR CONCENTRATIONS, PCI/M3, AND WL									
	U-238	Th-230	Ra-226	Pb-210	Rn-222	Po-218	Pb-214	Bi-214	Pb-210	WL
1.5	6.901E-03	3.406E-05	4.481E-05	4.469E-05	1.197E+01	1.100E+01	4.796E+00	2.233E+00	2.860E-06	4.397E-05
2.5	3.629E-03	1.804E-05	2.068E-05	2.063E-05	6.623E+00	6.427E+00	3.697E+00	2.263E+00	4.199E-06	3.381E-05
3.5	2.180E-03	1.089E-05	1.116E-05	1.114E-05	4.368E+00	4.322E+00	2.879E+00	2.034E+00	5.279E-06	2.664E-05
4.5	1.467E-03	7.331E-06	7.444E-06	7.425E-06	3.227E+00	3.212E+00	2.338E+00	1.792E+00	6.174E-06	2.185E-05
7.5	6.121E-04	3.059E-06	3.093E-06	3.085E-06	1.645E+00	1.645E+00	1.380E+00	1.173E+00	7.388E-06	1.307E-05
15.0	1.636E-04	8.178E-07	8.264E-07	8.244E-07	6.157E-01	6.160E-01	5.814E-01	5.378E-01	7.290E-06	5.588E-06
25.0	5.681E-05	2.839E-07	2.870E-07	2.863E-07	3.162E-01	3.163E-01	3.114E-01	3.024E-01	7.018E-06	3.033E-06
35.0	2.779E-05	1.389E-07	1.405E-07	1.401E-07	1.999E-01	2.000E-01	1.994E-01	1.973E-01	6.590E-06	1.953E-06
45.0	1.625E-05	8.123E-08	8.223E-08	8.202E-08	1.400E-01	1.401E-01	1.403E-01	1.399E-01	6.164E-06	1.378E-06
55.0	1.059E-05	5.290E-08	5.360E-08	5.346E-08	1.046E-01	1.047E-01	1.050E-01	1.051E-01	5.784E-06	1.032E-06
65.0	7.402E-06	3.699E-08	3.750E-08	3.741E-08	8.162E-02	8.167E-02	8.201E-02	8.218E-02	5.452E-06	8.064E-07
75.0	5.442E-06	2.719E-08	2.759E-08	2.752E-08	6.576E-02	6.579E-02	6.609E-02	6.628E-02	5.162E-06	6.501E-07

XRHO, KM	GROUND SURFACE CONCENTRATIONS, PCI/M2									
	U-238	Th-230	Ra-226	Pb-210	Rn-222	Po-218	Pb-214	Bi-214	Pb-210	
1.5	1.610E+04	7.652E+01	1.720E+02	1.720E+02	0.000E+00	1.807E+02	1.807E+02	1.807E+02	2.181E+00	
2.5	7.396E+03	3.606E+01	5.806E+01	5.806E+01	0.000E+00	6.315E+01	6.315E+01	6.315E+01	3.203E+00	
3.5	4.032E+03	2.007E+01	2.216E+01	2.216E+01	0.000E+00	2.558E+01	2.558E+01	2.558E+01	4.026E+00	
4.5	2.690E+03	1.342E+01	1.419E+01	1.419E+01	0.000E+00	1.673E+01	1.673E+01	1.673E+01	4.708E+00	
7.5	1.117E+03	5.578E+00	5.767E+00	5.767E+00	0.000E+00	7.070E+00	7.070E+00	7.070E+00	5.634E+00	
15.0	2.982E+02	1.489E+00	1.528E+00	1.528E+00	0.000E+00	2.015E+00	2.015E+00	2.015E+00	5.560E+00	
25.0	1.034E+02	5.165E-01	5.271E-01	5.271E-01	0.000E+00	7.777E-01	7.777E-01	7.777E-01	5.352E+00	
35.0	5.054E+01	2.525E-01	2.573E-01	2.573E-01	0.000E+00	4.157E-01	4.157E-01	4.157E-01	5.026E+00	
45.0	2.956E+01	1.476E-01	1.504E-01	1.504E-01	0.000E+00	2.613E-01	2.613E-01	2.613E-01	4.701E+00	
55.0	1.924E+01	9.613E-02	9.790E-02	9.790E-02	0.000E+00	1.808E-01	1.808E-01	1.808E-01	4.411E+00	
65.0	1.345E+01	6.721E-02	6.843E-02	6.843E-02	0.000E+00	1.331E-01	1.331E-01	1.331E-01	4.158E+00	
75.0	9.889E+00	4.940E-02	5.029E-02	5.029E-02	0.000E+00	1.024E-01	1.024E-01	1.024E-01	3.936E+00	

XRHO, KM	TOTAL DEPOSITION RATES, PCI/M2-SEC			
	U-238	Th-230	Ra-226	Pb-210
1.5	8.870E-05	4.217E-07	9.499E-07	9.561E-07
2.5	4.075E-05	1.987E-07	3.206E-07	3.324E-07
3.5	2.222E-05	1.106E-07	1.224E-07	1.379E-07
4.5	1.483E-05	7.395E-08	7.836E-08	9.668E-08
7.5	6.157E-06	3.074E-08	3.184E-08	5.393E-08
15.0	1.643E-06	8.205E-09	8.435E-09	3.028E-08
25.0	5.697E-07	2.846E-09	2.911E-09	2.396E-08
35.0	2.785E-07	1.391E-09	1.421E-09	2.119E-08
45.0	1.629E-07	8.136E-10	8.303E-10	1.932E-08
55.0	1.060E-07	5.297E-10	5.406E-10	1.789E-08
65.0	7.414E-08	3.704E-10	3.779E-10	1.673E-08
75.0	5.449E-08	2.722E-10	2.777E-10	1.576E-08

TIME STEP NUMBER 1, 10-Year Action Perio DURATION IN YRS IS... 10.0

SUMMARY PRINT OF POPULATION DOSES COMPUTED FOR TSTEP 1--DOSES SHOWN ARE ANNUAL POPULATION DOSE COMMITMENTS, PERSON-REM PER YEAR

DOSES RECEIVED BY PEOPLE WITHIN 80 KILOMETERS

PATHWAY	EFFECTIV	BONE	AVG.LUNG	LIVER	KIDNEY	BRONCHI
INHAL.	6.319E+01	9.063E+00	5.233E+02	1.269E+00	1.683E+00	2.885E+02
GROUND	5.593E-01	5.593E-01	5.593E-01	5.593E-01	5.593E-01	5.593E-01
CLOUD	1.199E+00	1.199E+00	1.199E+00	1.199E+00	1.199E+00	1.199E+00
VEG. ING	1.624E-01	2.144E+00	1.624E-01	2.248E-01	7.380E-01	1.624E-01
MEAT ING	5.925E-02	7.630E-01	5.925E-02	1.253E-01	2.365E-01	5.925E-02
MILK ING	1.667E-02	1.724E-01	1.667E-02	5.716E-03	7.403E-02	1.667E-02
RNPLUS50	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
TOTALS	6.519E+01	1.390E+01	5.253E+02	3.383E+00	4.490E+00	2.905E+02

DOSES RECEIVED BY PEOPLE BEYOND 80 KILOMETERS

PATHWAY	EFFECTIV	BONE	AVG.LUNG	LIVER	KIDNEY	BRONCHI
INHAL.	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
GROUND	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
CLOUD	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
VEG. ING	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
MEAT ING	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
MILK ING	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
RNPLUS50	4.134E+00	5.622E+01	9.397E-01	4.134E+00	4.134E+00	2.704E+01
TOTALS	4.134E+00	5.622E+01	9.397E-01	4.134E+00	4.134E+00	2.704E+01

TOTAL DOSES COMPUTED OVER ALL POPULATIONS

PATHWAY	EFFECTIV	BONE	AVG.LUNG	LIVER	KIDNEY	BRONCHI
INHAL.	6.319E+01	9.063E+00	5.233E+02	1.269E+00	1.683E+00	2.885E+02
GROUND	5.593E-01	5.593E-01	5.593E-01	5.593E-01	5.593E-01	5.593E-01
CLOUD	1.199E+00	1.199E+00	1.199E+00	1.199E+00	1.199E+00	1.199E+00
VEG. ING	1.624E-01	2.144E+00	1.624E-01	2.248E-01	7.380E-01	1.624E-01
MEAT ING	5.925E-02	7.630E-01	5.925E-02	1.253E-01	2.365E-01	5.925E-02
MILK ING	1.667E-02	1.724E-01	1.667E-02	5.716E-03	7.403E-02	1.667E-02
RNPLUS50	4.134E+00	5.622E+01	9.397E-01	4.134E+00	4.134E+00	2.704E+01
TOTALS	6.932E+01	7.012E+01	5.263E+02	7.516E+00	8.624E+00	3.176E+02

			INDIVIDUAL RECEPTOR PARTICULATE CONCENTRATIONS				GROUND CONCENTRATIONS, PCI/M2			
			AIRBORNE CONCENTRATIONS, PCI/M3							
NO.	NAME	PTSZ	U-238	Th-230	Ra-226	Pb-210	U-238	Th-230	Ra-226	Pb-210
1	Resident 1	1	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
1	Resident 1	2	2.491E-03	1.245E-05	1.245E-05	1.242E-05	4.520E+03	2.260E+01	2.255E+01	2.255E+01
1	Resident 1	3	3.071E-06	1.265E-08	7.828E-08	7.808E-08	5.573E+00	2.295E-02	1.418E-01	1.418E-01
1	Resident 1	4	1.621E-06	6.674E-09	4.131E-08	4.121E-08	2.573E+01	1.059E-01	6.545E-01	6.545E-01
	CONCENTRATION TOTALS		2.496E-03	1.247E-05	1.257E-05	1.254E-05	4.552E+03	2.273E+01	2.335E+01	2.335E+01
2	Resident 2	1	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
2	Resident 2	2	3.838E-03	1.919E-05	1.919E-05	1.914E-05	6.965E+03	3.483E+01	3.475E+01	3.475E+01
2	Resident 2	3	1.255E-06	5.169E-09	3.200E-08	3.192E-08	2.278E+00	9.380E-03	5.795E-02	5.795E-02
2	Resident 2	4	7.291E-07	3.002E-09	1.859E-08	1.854E-08	1.158E+01	4.766E-02	2.944E-01	2.944E-01
	CONCENTRATION TOTALS		3.840E-03	1.920E-05	1.924E-05	1.919E-05	6.979E+03	3.488E+01	3.511E+01	3.511E+01
3	Resident 3	1	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
3	Resident 3	2	2.767E-03	1.384E-05	1.383E-05	1.380E-05	5.022E+03	2.511E+01	2.505E+01	2.505E+01
3	Resident 3	3	3.310E-05	1.363E-07	8.438E-07	8.416E-07	6.007E+01	2.474E-01	1.528E+00	1.528E+00
3	Resident 3	4	2.659E-05	1.095E-07	6.778E-07	6.761E-07	4.221E+02	1.738E+00	1.074E+01	1.074E+01
	CONCENTRATION TOTALS		2.827E-03	1.408E-05	1.536E-05	1.532E-05	5.504E+03	2.709E+01	3.732E+01	3.732E+01
4	Resident 4	1	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
4	Resident 4	2	2.898E-03	1.449E-05	1.449E-05	1.445E-05	5.260E+03	2.630E+01	2.624E+01	2.624E+01
4	Resident 4	3	5.959E-05	2.454E-07	1.519E-06	1.515E-06	1.081E+02	4.453E-01	2.751E+00	2.751E+00
4	Resident 4	4	5.000E-05	2.059E-07	1.275E-06	1.271E-06	7.938E+02	3.269E+00	2.019E+01	2.019E+01
	CONCENTRATION TOTALS		3.008E-03	1.494E-05	1.728E-05	1.724E-05	6.162E+03	3.001E+01	4.919E+01	4.919E+01
5	Grazing Area 5	1	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
5	Grazing Area 5	2	3.920E-04	1.960E-06	1.960E-06	1.955E-06	7.113E+02	3.556E+00	3.549E+00	3.549E+00
5	Grazing Area 5	3	7.065E-07	2.909E-09	1.801E-08	1.796E-08	1.282E+00	5.279E-03	3.261E-02	3.261E-02
5	Grazing Area 5	4	3.241E-07	1.334E-09	8.260E-09	8.239E-09	5.145E+00	2.118E-02	1.309E-01	1.309E-01
	CONCENTRATION TOTALS		3.930E-04	1.964E-06	1.986E-06	1.981E-06	7.177E+02	3.583E+00	3.712E+00	3.712E+00
6	Resident 6	1	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
6	Resident 6	2	9.885E-04	4.943E-06	4.942E-06	4.930E-06	1.794E+03	8.969E+00	8.951E+00	8.951E+00
6	Resident 6	3	1.139E-06	4.690E-09	2.903E-08	2.896E-08	2.067E+00	8.510E-03	5.257E-02	5.257E-02
6	Resident 6	4	6.238E-07	2.569E-09	1.590E-08	1.586E-08	9.903E+00	4.078E-02	2.519E-01	2.519E-01
	CONCENTRATION TOTALS		9.903E-04	4.950E-06	4.987E-06	4.975E-06	1.806E+03	9.019E+00	9.255E+00	9.255E+00
7	Resident 7	1	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
7	Resident 7	2	4.130E-04	2.065E-06	2.065E-06	2.060E-06	7.495E+02	3.748E+00	3.740E+00	3.740E+00
7	Resident 7	3	8.384E-08	3.452E-10	2.137E-09	2.132E-09	1.521E-01	6.265E-04	3.870E-03	3.870E-03
7	Resident 7	4	3.483E-08	1.434E-10	8.877E-10	8.855E-10	5.529E-01	2.277E-03	1.406E-02	1.406E-02
	CONCENTRATION TOTALS		4.131E-04	2.066E-06	2.068E-06	2.063E-06	7.502E+02	3.750E+00	3.758E+00	3.758E+00
8	Resident 8	1	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
8	Resident 8	2	1.495E-04	7.475E-07	7.475E-07	7.456E-07	2.713E+02	1.356E+00	1.354E+00	1.354E+00
8	Resident 8	3	8.759E-08	3.607E-10	2.233E-09	2.227E-09	1.589E-01	6.545E-04	4.043E-03	4.043E-03
8	Resident 8	4	2.989E-08	1.231E-10	7.619E-10	7.600E-10	4.746E-01	1.954E-03	1.207E-02	1.207E-02
	CONCENTRATION TOTALS		1.496E-04	7.480E-07	7.505E-07	7.486E-07	2.719E+02	1.359E+00	1.370E+00	1.370E+00

REGION: SAMPLE ISL FACILITY
METSET: GENERIC MET STATION

CODE: MILDOS-AREA (02/97)
DATA: sampisl.dat

PAGE 18
03/14/97

TIME STEP NUMBER 1, 10-Year Action Perio

DURATION IN YRS IS... 10.0

NO.	INDIVIDUAL RECEPTOR RADON AND RADON DAUGHTER CONCENTRATIONS							GROUND CONCENTRATIONS, PCI/M2				
	AIRBORNE CONCENTRATIONS, PCI/M3											
	Rn-222	Po-218	Pb-214	Bi-214	Pb-210	Bi-210	Po-210	WL	Po-218	Pb-214	Bi-214	Pb-210
1	6.589E+00	6.373E+00	3.415E+00	1.779E+00	2.628E-06	7.712E-09	9.661E-13	3.052E-05	5.047E+00	5.047E+00	5.047E+00	2.004E+00
2	8.187E+00	7.286E+00	3.137E+00	1.595E+00	2.569E-06	8.451E-09	1.142E-12	2.936E-05	5.771E+00	5.771E+00	5.771E+00	1.959E+00
3	6.889E+00	6.294E+00	2.979E+00	1.595E+00	2.684E-06	8.414E-09	1.041E-12	2.754E-05	4.985E+00	4.985E+00	4.985E+00	2.047E+00
4	5.437E+00	5.294E+00	3.139E+00	1.980E+00	3.949E-06	1.069E-08	9.973E-13	2.875E-05	4.193E+00	4.193E+00	4.193E+00	3.011E+00
5	2.731E+00	2.712E+00	1.928E+00	1.315E+00	2.520E-06	5.462E-09	3.347E-13	1.747E-05	2.148E+00	2.148E+00	2.148E+00	1.922E+00
6	7.579E+00	7.326E+00	3.755E+00	1.853E+00	2.271E-06	4.011E-09	2.411E-13	3.349E-05	5.802E+00	5.802E+00	5.802E+00	1.732E+00
7	6.752E+00	5.504E+00	2.335E+00	1.367E+00	3.204E-06	9.216E-09	7.482E-13	2.261E-05	4.360E+00	4.360E+00	4.360E+00	2.443E+00
8	3.607E+00	3.506E+00	2.233E+00	1.539E+00	4.115E-06	1.460E-08	1.600E-12	2.067E-05	2.777E+00	2.777E+00	2.777E+00	3.138E+00

REGION: SAMPLE ISL FACILITY
METSET: GENERIC MET STATION

CODE: MILDOS-AREA (02/97)
DATA: sampisl.dat

PAGE 19
03/14/97

TIME STEP NUMBER 1, 10-Year Action Perio DURATION IN YRS IS... 10.0

NUMBER 1 NAME=Resident 1 X= 1.0KM, Y= 1.3KM, Z= 0.0M, DIST= 1.7KM, IRTYPE= 0

RESULTS OF ALC CHECK AT THIS LOCATION

	U-238	U-234	Th-230	Ra-226	Rn-222(WL)	Pb-210	Bi-210	Po-210
CONC., PCI/M3	2.50E-03	2.50E-03	1.25E-05	1.26E-05	3.05E-05	1.52E-05	1.25E-05	1.25E-05
ALC, PCI/M3	6.00E-02	5.00E-02	3.00E-02	9.00E-01	1.10E-03	6.00E-01	4.00E+01	9.00E-01
FRACTION OF ALC	4.16E-02	4.99E-02	4.16E-04	1.40E-05	2.77E-02	2.53E-05	3.14E-07	1.39E-05

SUM OF FRACTIONS EQUALS 1.20E-01

NUMBER 2 NAME=Resident 2 X= 1.5KM, Y= 0.1KM, Z= 0.0M, DIST= 1.5KM, IRTYPE= 0

RESULTS OF ALC CHECK AT THIS LOCATION

	U-238	U-234	Th-230	Ra-226	Rn-222(WL)	Pb-210	Bi-210	Po-210
CONC., PCI/M3	3.84E-03	3.84E-03	1.92E-05	1.92E-05	2.94E-05	2.18E-05	1.92E-05	1.92E-05
ALC, PCI/M3	6.00E-02	5.00E-02	3.00E-02	9.00E-01	1.10E-03	6.00E-01	4.00E+01	9.00E-01
FRACTION OF ALC	6.40E-02	7.68E-02	6.40E-04	2.14E-05	2.67E-02	3.63E-05	4.80E-07	2.13E-05

SUM OF FRACTIONS EQUALS 1.68E-01

REGION: SAMPLE ISL FACILITY
METSET: GENERIC MET STATION

CODE: MILDOS-AREA (02/97)
DATA: sampisl.dat

PAGE 20
03/14/97

TIME STEP NUMBER 1, 10-Year Action Perio DURATION IN YRS IS... 10.0

NUMBER 3 NAME=Resident 3 X= 1.0KM, Y= -1.3KM, Z= 0.0M, DIST= 1.6KM, IRTYPE= 0

RESULTS OF ALC CHECK AT THIS LOCATION

	U-238	U-234	Th-230	Ra-226	Rn-222(WL)	Pb-210	Bi-210	Po-210
CONC., PCI/M3	2.83E-03	2.83E-03	1.41E-05	1.54E-05	2.75E-05	1.80E-05	1.53E-05	1.53E-05
ALC, PCI/M3	6.00E-02	5.00E-02	3.00E-02	9.00E-01	1.10E-03	6.00E-01	4.00E+01	9.00E-01
FRACTION OF ALC	4.71E-02	5.65E-02	4.69E-04	1.71E-05	2.50E-02	3.00E-05	3.83E-07	1.70E-05

SUM OF FRACTIONS EQUALS 1.29E-01

NUMBER 4 NAME=Resident 4 X= 0.2KM, Y= -2.6KM, Z= 0.0M, DIST= 2.6KM, IRTYPE= 0

RESULTS OF ALC CHECK AT THIS LOCATION

	U-238	U-234	Th-230	Ra-226	Rn-222(WL)	Pb-210	Bi-210	Po-210
CONC., PCI/M3	3.01E-03	3.01E-03	1.49E-05	1.73E-05	2.87E-05	2.12E-05	1.73E-05	1.72E-05
ALC, PCI/M3	6.00E-02	5.00E-02	3.00E-02	9.00E-01	1.10E-03	6.00E-01	4.00E+01	9.00E-01
FRACTION OF ALC	5.01E-02	6.02E-02	4.98E-04	1.92E-05	2.61E-02	3.53E-05	4.31E-07	1.92E-05

SUM OF FRACTIONS EQUALS 1.37E-01

REGION: SAMPLE ISL FACILITY
METSET: GENERIC MET STATION

CODE: MILDOS-AREA (02/97)
DATA: sampisl.dat

PAGE 21
03/14/97

TIME STEP NUMBER 1, 10-Year Action Perio DURATION IN YRS IS... 10.0

NUMBER 5 NAME=Grazing Area 5 X= -3.2KM, Y= 1.3KM, Z= 0.0M, DIST= 3.4KM, IRTYPE= 0

RESULTS OF ALC CHECK AT THIS LOCATION

	U-238	U-234	Th-230	Ra-226	Rn-222 (WL)	Pb-210	Bi-210	Po-210
CONC., PCI/M3	3.93E-04	3.93E-04	1.96E-06	1.99E-06	1.75E-05	4.50E-06	1.99E-06	1.98E-06
ALC, PCI/M3	6.00E-02	5.00E-02	3.00E-02	9.00E-01	1.10E-03	6.00E-01	4.00E+01	9.00E-01
FRACTION OF ALC	6.55E-03	7.86E-03	6.55E-05	2.21E-06	1.59E-02	7.50E-06	4.97E-08	2.20E-06

SUM OF FRACTIONS EQUALS 3.04E-02

NUMBER 6 NAME=Resident 6 X= -2.3KM, Y= -0.1KM, Z= 0.0M, DIST= 2.3KM, IRTYPE= 0

RESULTS OF ALC CHECK AT THIS LOCATION

	U-238	U-234	Th-230	Ra-226	Rn-222 (WL)	Pb-210	Bi-210	Po-210
CONC., PCI/M3	9.90E-04	9.90E-04	4.95E-06	4.99E-06	3.35E-05	7.25E-06	4.98E-06	4.97E-06
ALC, PCI/M3	6.00E-02	5.00E-02	3.00E-02	9.00E-01	1.10E-03	6.00E-01	4.00E+01	9.00E-01
FRACTION OF ALC	1.65E-02	1.98E-02	1.65E-04	5.54E-06	3.04E-02	1.21E-05	1.24E-07	5.53E-06

SUM OF FRACTIONS EQUALS 6.69E-02

REGION: SAMPLE ISL FACILITY
METSET: GENERIC MET STATION

CODE: MILDOS-AREA (02/97)
DATA: sampisl.dat

PAGE 22
03/14/97

TIME STEP NUMBER 1, 10-Year Action Perio DURATION IN YRS IS... 10.0

NUMBER 7 NAME=Resident 7 X= -4.4KM, Y= -1.5KM, Z= 0.0M, DIST= 4.7KM, IRTYPE= 0

RESULTS OF ALC CHECK AT THIS LOCATION

	U-238	U-234	Th-230	Ra-226	Rn-222(WL)	Pb-210	Bi-210	Po-210
CONC., PCI/M3	4.13E-04	4.13E-04	2.07E-06	2.07E-06	2.26E-05	5.27E-06	2.07E-06	2.06E-06
ALC, PCI/M3	6.00E-02	5.00E-02	3.00E-02	9.00E-01	1.10E-03	6.00E-01	4.00E+01	9.00E-01
FRACTION OF ALC	6.89E-03	8.26E-03	6.89E-05	2.30E-06	2.06E-02	8.78E-06	5.18E-08	2.29E-06

SUM OF FRACTIONS EQUALS 3.58E-02

NUMBER 8 NAME=Resident 8 X= -6.3KM, Y= 2.0KM, Z= 0.0M, DIST= 6.6KM, IRTYPE= 0

RESULTS OF ALC CHECK AT THIS LOCATION

	U-238	U-234	Th-230	Ra-226	Rn-222(WL)	Pb-210	Bi-210	Po-210
CONC., PCI/M3	1.50E-04	1.50E-04	7.48E-07	7.50E-07	2.07E-05	4.86E-06	7.63E-07	7.49E-07
ALC, PCI/M3	6.00E-02	5.00E-02	3.00E-02	9.00E-01	1.10E-03	6.00E-01	4.00E+01	9.00E-01
FRACTION OF ALC	2.49E-03	2.99E-03	2.49E-05	8.34E-07	1.88E-02	8.11E-06	1.91E-08	8.32E-07

SUM OF FRACTIONS EQUALS 2.43E-02

TIME STEP NUMBER 2, 10-Year Restoration DURATION IN YRS IS... 10.0

CONCENTRATION DATA FOR THE N DIRECTION, THETA EQUALS 0.0 DEGREES

XRHO, KM	TOTAL AIR CONCENTRATIONS, PCI/M3, AND WL									
	U-238	Th-230	Ra-226	Pb-210	Rn-222	Po-218	Pb-214	Bi-214	Pb-210	WL
1.5	3.678E-05	1.681E-07	5.502E-07	5.491E-07	1.636E-01	1.597E-01	9.970E-02	6.662E-02	1.318E-07	9.184E-07
2.5	2.333E-05	1.052E-07	3.817E-07	3.808E-07	1.212E-01	1.197E-01	8.290E-02	6.188E-02	1.749E-07	7.744E-07
3.5	1.609E-05	7.196E-08	2.778E-07	2.772E-07	9.328E-02	9.272E-02	6.869E-02	5.452E-02	2.049E-07	6.471E-07
4.5	1.180E-05	5.245E-08	2.112E-07	2.107E-07	7.437E-02	7.414E-02	5.762E-02	4.741E-02	2.250E-07	5.453E-07
7.5	5.830E-06	2.563E-08	1.109E-07	1.106E-07	4.368E-02	4.367E-02	3.707E-02	3.208E-02	2.512E-07	3.526E-07
15.0	2.034E-06	8.813E-09	4.167E-08	4.157E-08	1.954E-02	1.955E-02	1.817E-02	1.665E-02	2.492E-07	1.743E-07
25.0	8.420E-07	3.621E-09	1.788E-08	1.783E-08	9.738E-03	9.744E-03	9.501E-03	9.122E-03	2.276E-07	9.223E-08
35.0	4.677E-07	2.003E-09	1.013E-08	1.011E-08	6.081E-03	6.085E-03	6.034E-03	5.921E-03	2.085E-07	5.894E-08
45.0	3.009E-07	1.285E-09	6.601E-09	6.585E-09	4.245E-03	4.247E-03	4.241E-03	4.206E-03	1.930E-07	4.157E-08
55.0	2.139E-07	9.115E-10	4.741E-09	4.730E-09	3.203E-03	3.205E-03	3.210E-03	3.199E-03	1.803E-07	3.151E-08
65.0	1.587E-07	6.754E-10	3.536E-09	3.528E-09	2.492E-03	2.494E-03	2.502E-03	2.501E-03	1.694E-07	2.458E-08
75.0	1.229E-07	5.223E-10	2.750E-09	2.743E-09	2.005E-03	2.006E-03	2.014E-03	2.017E-03	1.601E-07	1.980E-08

XRHO, KM	GROUND SURFACE CONCENTRATIONS, PCI/M2									
	U-238	Th-230	Ra-226	Pb-210	Rn-222	Po-218	Pb-214	Bi-214	Pb-210	
1.5	1.910E+04	9.527E+01	9.946E+01	9.946E+01	0.000E+00	9.958E+01	9.958E+01	9.958E+01	1.810E+00	
2.5	1.053E+04	5.253E+01	5.549E+01	5.549E+01	0.000E+00	5.558E+01	5.558E+01	5.558E+01	3.091E+00	
3.5	6.562E+03	3.271E+01	3.484E+01	3.484E+01	0.000E+00	3.491E+01	3.491E+01	3.491E+01	4.329E+00	
4.5	4.451E+03	2.218E+01	2.377E+01	2.377E+01	0.000E+00	2.383E+01	2.383E+01	2.383E+01	5.249E+00	
7.5	1.877E+03	9.350E+00	1.013E+01	1.013E+01	0.000E+00	1.017E+01	1.017E+01	1.017E+01	6.568E+00	
15.0	5.089E+02	2.533E+00	2.790E+00	2.790E+00	0.000E+00	2.806E+00	2.806E+00	2.806E+00	6.862E+00	
25.0	1.794E+02	8.926E-01	9.866E-01	9.866E-01	0.000E+00	9.944E-01	9.944E-01	9.944E-01	6.608E+00	
35.0	8.949E+01	4.453E-01	4.928E-01	4.928E-01	0.000E+00	4.976E-01	4.976E-01	4.976E-01	6.207E+00	
45.0	5.352E+01	2.663E-01	2.946E-01	2.946E-01	0.000E+00	2.980E-01	2.980E-01	2.980E-01	5.819E+00	
55.0	3.565E+01	1.774E-01	1.965E-01	1.965E-01	0.000E+00	1.991E-01	1.991E-01	1.991E-01	5.474E+00	
65.0	2.547E+01	1.267E-01	1.402E-01	1.402E-01	0.000E+00	1.422E-01	1.422E-01	1.422E-01	5.171E+00	
75.0	1.910E+01	9.504E-02	1.051E-01	1.051E-01	0.000E+00	1.066E-01	1.066E-01	1.066E-01	4.905E+00	

XRHO, KM	TOTAL DEPOSITION RATES, PCI/M2-SEC			
	U-238	Th-230	Ra-226	Pb-210
1.5	8.585E-07	3.702E-09	1.801E-08	1.836E-08
2.5	5.638E-07	2.413E-09	1.224E-08	1.274E-08
3.5	3.920E-07	1.671E-09	8.668E-09	9.262E-09
4.5	2.862E-07	1.217E-09	6.399E-09	7.059E-09
7.5	1.362E-07	5.768E-10	3.093E-09	3.839E-09
15.0	4.318E-08	1.822E-10	9.988E-10	1.744E-09
25.0	1.565E-08	6.597E-11	3.630E-10	1.045E-09
35.0	7.882E-09	3.322E-11	1.830E-10	8.081E-10
45.0	4.703E-09	1.982E-11	1.092E-10	6.878E-10
55.0	3.168E-09	1.335E-11	7.363E-11	6.144E-10
65.0	2.236E-09	9.424E-12	5.190E-11	5.601E-10
75.0	1.662E-09	7.009E-12	3.855E-11	5.188E-10

TIME STEP NUMBER 2, 10-Year Restoration DURATION IN YRS IS... 10.0

CONCENTRATION DATA FOR THE E DIRECTION, THETA EQUALS 90.0 DEGREES

XRHO, KM	TOTAL AIR CONCENTRATIONS, PCI/M3, AND WL									
	U-238	Th-230	Ra-226	Pb-210	Rn-222	Po-218	Pb-214	Bi-214	Pb-210	WL
1.5	8.963E-06	4.283E-08	9.052E-08	9.038E-08	7.750E-02	7.626E-02	4.866E-02	3.053E-02	4.981E-08	4.391E-07
2.5	5.339E-06	2.514E-08	6.267E-08	6.255E-08	4.215E-02	4.177E-02	2.931E-02	2.094E-02	4.848E-08	2.698E-07
3.5	5.153E-06	2.316E-08	8.603E-08	8.584E-08	2.908E-02	2.888E-02	2.120E-02	1.629E-02	5.089E-08	1.980E-07
4.5	5.672E-06	2.467E-08	1.139E-07	1.136E-07	2.375E-02	2.362E-02	1.772E-02	1.417E-02	5.688E-08	1.670E-07
7.5	4.256E-06	1.809E-08	9.534E-08	9.511E-08	1.436E-02	1.434E-02	1.149E-02	9.609E-03	6.615E-08	1.089E-07
15.0	1.844E-06	7.754E-09	4.328E-08	4.317E-08	6.316E-03	6.319E-03	5.630E-03	4.963E-03	6.695E-08	5.357E-08
25.0	8.336E-07	3.492E-09	1.986E-08	1.981E-08	3.150E-03	3.152E-03	3.003E-03	2.801E-03	6.147E-08	2.892E-08
35.0	4.796E-07	2.006E-09	1.151E-08	1.148E-08	1.965E-03	1.966E-03	1.925E-03	1.854E-03	5.650E-08	1.870E-08
45.0	3.142E-07	1.313E-09	7.570E-09	7.551E-09	1.371E-03	1.372E-03	1.360E-03	1.334E-03	5.241E-08	1.328E-08
55.0	2.269E-07	9.469E-10	5.486E-09	5.472E-09	1.037E-03	1.038E-03	1.035E-03	1.024E-03	4.908E-08	1.014E-08
65.0	1.693E-07	7.061E-10	4.101E-09	4.091E-09	8.075E-04	8.079E-04	8.085E-04	8.046E-04	4.619E-08	7.932E-09
75.0	1.316E-07	5.489E-10	3.194E-09	3.186E-09	6.502E-04	6.506E-04	6.522E-04	6.513E-04	4.370E-08	6.406E-09

XRHO, KM	GROUND SURFACE CONCENTRATIONS, PCI/M2									
	U-238	Th-230	Ra-226	Pb-210	Rn-222	Po-218	Pb-214	Bi-214	Pb-210	
1.5	6.751E+03	3.373E+01	3.414E+01	3.414E+01	0.000E+00	3.420E+01	3.420E+01	3.420E+01	1.322E+00	
2.5	3.600E+03	1.798E+01	1.834E+01	1.834E+01	0.000E+00	1.837E+01	1.837E+01	1.837E+01	1.655E+00	
3.5	2.246E+03	1.119E+01	1.194E+01	1.194E+01	0.000E+00	1.196E+01	1.196E+01	1.196E+01	1.893E+00	
4.5	1.550E+03	7.702E+00	8.787E+00	8.787E+00	0.000E+00	8.805E+00	8.805E+00	8.805E+00	2.049E+00	
7.5	6.825E+02	3.374E+00	4.264E+00	4.264E+00	0.000E+00	4.275E+00	4.275E+00	4.275E+00	2.232E+00	
15.0	1.986E+02	9.779E-01	1.333E+00	1.333E+00	0.000E+00	1.338E+00	1.338E+00	1.338E+00	2.142E+00	
25.0	7.434E+01	3.657E-01	5.067E-01	5.067E-01	0.000E+00	5.092E-01	5.092E-01	5.092E-01	1.927E+00	
35.0	3.847E+01	1.892E-01	2.622E-01	2.622E-01	0.000E+00	2.638E-01	2.638E-01	2.638E-01	1.763E+00	
45.0	2.349E+01	1.156E-01	1.594E-01	1.594E-01	0.000E+00	1.605E-01	1.605E-01	1.605E-01	1.633E+00	
55.0	1.586E+01	7.802E-02	1.077E-01	1.077E-01	0.000E+00	1.085E-01	1.085E-01	1.085E-01	1.528E+00	
65.0	1.139E+01	5.608E-02	7.682E-02	7.682E-02	0.000E+00	7.746E-02	7.746E-02	7.746E-02	1.439E+00	
75.0	8.572E+00	4.221E-02	5.748E-02	5.748E-02	0.000E+00	5.799E-02	5.799E-02	5.799E-02	1.363E+00	

XRHO, KM	TOTAL DEPOSITION RATES, PCI/M2-SEC			
	U-238	Th-230	Ra-226	Pb-210
1.5	1.548E-07	6.967E-10	2.567E-09	2.710E-09
2.5	1.028E-07	4.548E-10	1.886E-09	2.027E-09
3.5	1.356E-07	5.779E-10	3.004E-09	3.149E-09
4.5	1.736E-07	7.279E-10	4.117E-09	4.277E-09
7.5	1.338E-07	5.567E-10	3.280E-09	3.470E-09
15.0	5.240E-08	2.174E-10	1.298E-09	1.496E-09
25.0	2.070E-08	8.582E-11	5.136E-10	6.968E-10
35.0	1.071E-08	4.440E-11	2.657E-10	4.346E-10
45.0	6.431E-09	2.667E-11	1.595E-10	3.164E-10
55.0	4.350E-09	1.804E-11	1.079E-10	2.549E-10
65.0	3.045E-09	1.263E-11	7.549E-11	2.139E-10
75.0	2.243E-09	9.304E-12	5.556E-11	1.865E-10

TIME STEP NUMBER 2, 10-Year Restoration DURATION IN YRS IS... 10.0

CONCENTRATION DATA FOR THE S DIRECTION, THETA EQUALS 180.0 DEGREES

XRHO, KM	TOTAL AIR CONCENTRATIONS, PCI/M3, AND WL									
	U-238	Th-230	Ra-226	Pb-210	Rn-222	Po-218	Pb-214	Bi-214	Pb-210	WL
1.5	5.169E-04	2.137E-06	1.297E-05	1.293E-05	1.023E+00	7.202E-01	1.371E-01	2.818E-02	9.674E-09	1.542E-06
2.5	1.303E-04	5.413E-07	3.207E-06	3.199E-06	3.505E-01	2.971E-01	9.619E-02	3.168E-02	1.805E-08	9.119E-07
3.5	1.647E-05	7.082E-08	3.495E-07	3.486E-07	1.368E-01	1.306E-01	6.602E-02	3.396E-02	3.770E-08	5.960E-07
4.5	7.618E-06	3.341E-08	1.468E-07	1.464E-07	9.492E-02	9.312E-02	5.715E-02	3.667E-02	6.656E-08	5.225E-07
7.5	2.543E-06	1.132E-08	4.501E-08	4.491E-08	4.153E-02	4.147E-02	3.288E-02	2.681E-02	1.199E-07	3.094E-07
15.0	6.674E-07	2.975E-09	1.172E-08	1.169E-08	1.452E-02	1.453E-02	1.334E-02	1.207E-02	1.360E-07	1.276E-07
25.0	2.328E-07	1.038E-09	4.097E-09	4.087E-09	6.238E-03	6.242E-03	6.111E-03	5.890E-03	1.251E-07	5.938E-08
35.0	1.189E-07	5.282E-10	2.132E-09	2.127E-09	3.674E-03	3.676E-03	3.659E-03	3.611E-03	1.138E-07	3.581E-08
45.0	7.255E-08	3.213E-10	1.324E-09	1.321E-09	2.485E-03	2.486E-03	2.488E-03	2.479E-03	1.046E-07	2.442E-08
55.0	4.949E-08	2.185E-10	9.193E-10	9.172E-10	1.836E-03	1.837E-03	1.843E-03	1.842E-03	9.716E-08	1.811E-08
65.0	3.570E-08	1.573E-10	6.708E-10	6.692E-10	1.409E-03	1.410E-03	1.416E-03	1.418E-03	9.087E-08	1.392E-08
75.0	2.702E-08	1.188E-10	5.128E-10	5.116E-10	1.122E-03	1.123E-03	1.128E-03	1.131E-03	8.554E-08	1.109E-08

XRHO, KM	GROUND SURFACE CONCENTRATIONS, PCI/M2									
	U-238	Th-230	Ra-226	Pb-210	Rn-222	Po-218	Pb-214	Bi-214	Pb-210	
1.5	1.850E+04	8.508E+01	2.632E+02	2.632E+02	0.000E+00	2.638E+02	2.638E+02	2.638E+02	1.399E+00	
2.5	7.473E+03	3.565E+01	7.665E+01	7.665E+01	0.000E+00	7.689E+01	7.689E+01	7.689E+01	2.057E+00	
3.5	3.610E+03	1.788E+01	2.175E+01	2.175E+01	0.000E+00	2.185E+01	2.185E+01	2.185E+01	2.597E+00	
4.5	2.380E+03	1.183E+01	1.325E+01	1.325E+01	0.000E+00	1.333E+01	1.333E+01	1.333E+01	3.054E+00	
7.5	9.821E+02	4.894E+00	5.237E+00	5.237E+00	0.000E+00	5.270E+00	5.270E+00	5.270E+00	3.686E+00	
15.0	2.615E+02	1.304E+00	1.374E+00	1.374E+00	0.000E+00	1.385E+00	1.385E+00	1.385E+00	3.651E+00	
25.0	9.056E+01	4.518E-01	4.709E-01	4.709E-01	0.000E+00	4.759E-01	4.759E-01	4.759E-01	3.510E+00	
35.0	4.425E+01	2.208E-01	2.294E-01	2.294E-01	0.000E+00	2.323E-01	2.323E-01	2.323E-01	3.293E+00	
45.0	2.587E+01	1.291E-01	1.339E-01	1.339E-01	0.000E+00	1.359E-01	1.359E-01	1.359E-01	3.079E+00	
55.0	1.684E+01	8.406E-02	8.721E-02	8.721E-02	0.000E+00	8.866E-02	8.866E-02	8.866E-02	2.888E+00	
65.0	1.178E+01	5.877E-02	6.093E-02	6.093E-02	0.000E+00	6.205E-02	6.205E-02	6.205E-02	2.722E+00	
75.0	8.656E+00	4.320E-02	4.478E-02	4.478E-02	0.000E+00	4.567E-02	4.567E-02	4.567E-02	2.576E+00	

XRHO, KM	TOTAL DEPOSITION RATES, PCI/M2-SEC			
	U-238	Th-230	Ra-226	Pb-210
1.5	2.513E-05	1.036E-07	6.384E-07	6.368E-07
2.5	5.829E-06	2.405E-08	1.474E-07	1.471E-07
3.5	5.908E-07	2.463E-09	1.436E-08	1.443E-08
4.5	2.320E-07	9.758E-10	5.440E-09	5.626E-09
7.5	6.192E-08	2.635E-10	1.380E-09	1.737E-09
15.0	1.346E-08	5.769E-11	2.901E-10	6.975E-10
25.0	3.957E-09	1.708E-11	8.249E-11	4.576E-10
35.0	1.832E-09	7.930E-12	3.772E-11	3.789E-10
45.0	1.044E-09	4.524E-12	2.135E-11	3.350E-10
55.0	6.791E-10	2.943E-12	1.389E-11	3.053E-10
65.0	4.696E-10	2.036E-12	9.578E-12	2.822E-10
75.0	3.436E-10	1.491E-12	7.000E-12	2.636E-10

TIME STEP NUMBER 2, 10-Year Restoration DURATION IN YRS IS... 10.0

CONCENTRATION DATA FOR THE W DIRECTION, THETA EQUALS 270.0 DEGREES

XRHO, KM	TOTAL AIR CONCENTRATIONS, PCI/M3, AND WL									
	U-238	Th-230	Ra-226	Pb-210	Rn-222	Po-218	Pb-214	Bi-214	Pb-210	WL
1.5	1.703E-05	7.218E-08	3.858E-07	3.848E-07	1.739E-01	1.636E-01	7.841E-02	3.753E-02	3.591E-08	7.060E-07
2.5	2.670E-06	1.226E-08	3.862E-08	3.854E-08	7.817E-02	7.697E-02	4.816E-02	2.835E-02	3.937E-08	4.292E-07
3.5	1.320E-06	6.238E-09	1.498E-08	1.496E-08	3.646E-02	3.630E-02	2.716E-02	1.940E-02	3.979E-08	2.474E-07
4.5	8.162E-07	3.902E-09	8.199E-09	8.186E-09	2.129E-02	2.126E-02	1.758E-02	1.410E-02	4.056E-08	1.636E-07
7.5	3.036E-07	1.468E-09	2.677E-09	2.674E-09	1.068E-02	1.068E-02	9.980E-03	9.236E-03	5.585E-08	9.606E-08
15.0	6.962E-08	3.371E-10	6.011E-10	6.003E-10	4.153E-03	4.155E-03	4.092E-03	3.997E-03	6.063E-08	3.994E-08
25.0	2.077E-08	1.002E-10	1.885E-10	1.882E-10	1.925E-03	1.927E-03	1.927E-03	1.918E-03	5.537E-08	1.891E-08
35.0	9.299E-09	4.462E-11	8.967E-11	8.953E-11	1.165E-03	1.165E-03	1.169E-03	1.171E-03	5.033E-08	1.150E-08
45.0	5.232E-09	2.501E-11	5.272E-11	5.264E-11	7.977E-04	7.981E-04	8.017E-04	8.037E-04	4.629E-08	7.884E-09
55.0	3.396E-09	1.618E-11	3.543E-11	3.537E-11	5.951E-04	5.955E-04	5.982E-04	6.001E-04	4.308E-08	5.885E-09
65.0	2.395E-09	1.139E-11	2.538E-11	2.534E-11	4.578E-04	4.581E-04	4.603E-04	4.619E-04	4.033E-08	4.528E-09
75.0	1.788E-09	8.499E-12	1.917E-11	1.914E-11	3.648E-04	3.650E-04	3.668E-04	3.681E-04	3.800E-08	3.608E-09

XRHO, KM	GROUND SURFACE CONCENTRATIONS, PCI/M2									
	U-238	Th-230	Ra-226	Pb-210	Rn-222	Po-218	Pb-214	Bi-214	Pb-210	
1.5	2.548E+03	1.256E+01	1.671E+01	1.671E+01	0.000E+00	1.684E+01	1.684E+01	1.684E+01	8.286E-01	
2.5	1.449E+03	7.232E+00	7.513E+00	7.513E+00	0.000E+00	7.574E+00	7.574E+00	7.574E+00	1.170E+00	
3.5	9.146E+02	4.568E+00	4.644E+00	4.644E+00	0.000E+00	4.673E+00	4.673E+00	4.673E+00	1.450E+00	
4.5	6.167E+02	3.081E+00	3.113E+00	3.113E+00	0.000E+00	3.130E+00	3.130E+00	3.130E+00	1.599E+00	
7.5	2.473E+02	1.236E+00	1.241E+00	1.241E+00	0.000E+00	1.249E+00	1.249E+00	1.249E+00	1.796E+00	
15.0	5.728E+01	2.863E-01	2.866E-01	2.866E-01	0.000E+00	2.899E-01	2.899E-01	2.899E-01	2.046E+00	
25.0	1.664E+01	8.319E-02	8.323E-02	8.323E-02	0.000E+00	8.476E-02	8.476E-02	8.476E-02	1.811E+00	
35.0	7.192E+00	3.595E-02	3.597E-02	3.597E-02	0.000E+00	3.690E-02	3.690E-02	3.690E-02	1.619E+00	
45.0	3.936E+00	1.967E-02	1.969E-02	1.969E-02	0.000E+00	2.032E-02	2.032E-02	2.032E-02	1.478E+00	
55.0	2.495E+00	1.247E-02	1.249E-02	1.249E-02	0.000E+00	1.296E-02	1.296E-02	1.296E-02	1.370E+00	
65.0	1.741E+00	8.700E-03	8.709E-03	8.709E-03	0.000E+00	9.072E-03	9.072E-03	9.072E-03	1.281E+00	
75.0	1.289E+00	6.444E-03	6.450E-03	6.450E-03	0.000E+00	6.739E-03	6.739E-03	6.739E-03	1.205E+00	

XRHO, KM	TOTAL DEPOSITION RATES, PCI/M2-SEC			
	U-238	Th-230	Ra-226	Pb-210
1.5	6.156E-07	2.555E-09	1.521E-08	1.528E-08
2.5	5.999E-08	2.597E-10	1.235E-09	1.350E-09
3.5	2.381E-08	1.061E-10	4.202E-10	5.386E-10
4.5	1.334E-08	6.035E-11	2.140E-10	3.352E-10
7.5	4.232E-09	1.960E-11	5.724E-11	2.247E-10
15.0	8.717E-10	4.094E-12	1.048E-11	1.924E-10
25.0	2.458E-10	1.159E-12	2.855E-12	1.689E-10
35.0	1.070E-10	5.041E-13	1.255E-12	1.522E-10
45.0	5.900E-11	2.776E-13	6.975E-13	1.396E-10
55.0	3.778E-11	1.775E-13	4.516E-13	1.297E-10
65.0	2.626E-11	1.234E-13	3.127E-13	1.213E-10
75.0	1.939E-11	9.118E-14	2.300E-13	1.142E-10

TIME STEP NUMBER 2, 10-Year Restoration

DURATION IN YRS IS... 10.0

SUMMARY PRINT OF POPULATION DOSES COMPUTED FOR TSTEP 2--DOSES SHOWN ARE ANNUAL POPULATION DOSE COMMITMENTS, PERSON-REM PER YEAR

DOSES RECEIVED BY PEOPLE WITHIN 80 KILOMETERS

PATHWAY	EFFECTIV	BONE	AVG.LUNG	LIVER	KIDNEY	BRONCHI
INHAL.	2.868E-01	8.224E-02	2.047E+00	2.671E-02	2.174E-02	4.510E+00
GROUND	4.960E-01	4.960E-01	4.960E-01	4.960E-01	4.960E-01	4.960E-01
CLOUD	2.014E-02	2.014E-02	2.014E-02	2.014E-02	2.014E-02	2.014E-02
VEG. ING	1.033E-02	1.392E-01	1.033E-02	1.305E-02	4.636E-02	1.033E-02
MEAT ING	5.374E-03	6.754E-02	5.374E-03	1.383E-02	1.902E-02	5.374E-03
MILK ING	1.084E-03	1.147E-02	1.084E-03	6.198E-04	4.549E-03	1.084E-03
RNPLUS50	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
TOTALS	8.197E-01	8.167E-01	2.580E+00	5.704E-01	6.079E-01	5.043E+00

DOSES RECEIVED BY PEOPLE BEYOND 80 KILOMETERS

PATHWAY	EFFECTIV	BONE	AVG.LUNG	LIVER	KIDNEY	BRONCHI
INHAL.	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
GROUND	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
CLOUD	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
VEG. ING	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
MEAT ING	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
MILK ING	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
RNPLUS50	6.540E-02	8.894E-01	1.487E-02	6.540E-02	6.540E-02	4.278E-01
TOTALS	6.540E-02	8.894E-01	1.487E-02	6.540E-02	6.540E-02	4.278E-01

TOTAL DOSES COMPUTED OVER ALL POPULATIONS

PATHWAY	EFFECTIV	BONE	AVG.LUNG	LIVER	KIDNEY	BRONCHI
INHAL.	2.868E-01	8.224E-02	2.047E+00	2.671E-02	2.174E-02	4.510E+00
GROUND	4.960E-01	4.960E-01	4.960E-01	4.960E-01	4.960E-01	4.960E-01
CLOUD	2.014E-02	2.014E-02	2.014E-02	2.014E-02	2.014E-02	2.014E-02
VEG. ING	1.033E-02	1.392E-01	1.033E-02	1.305E-02	4.636E-02	1.033E-02
MEAT ING	5.374E-03	6.754E-02	5.374E-03	1.383E-02	1.902E-02	5.374E-03
MILK ING	1.084E-03	1.147E-02	1.084E-03	6.198E-04	4.549E-03	1.084E-03
RNPLUS50	6.540E-02	8.894E-01	1.487E-02	6.540E-02	6.540E-02	4.278E-01
TOTALS	8.851E-01	1.706E+00	2.594E+00	6.358E-01	6.732E-01	5.470E+00

			INDIVIDUAL RECEPTOR PARTICULATE CONCENTRATIONS				GROUND CONCENTRATIONS, PCI/M2			
			AIRBORNE CONCENTRATIONS, PCI/M3							
NO.	NAME	PTSZ	U-238	Th-230	Ra-226	Pb-210	U-238	Th-230	Ra-226	Pb-210
1	Resident 1	1	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
1	Resident 1	2	3.935E-06	1.967E-08	1.955E-08	1.955E-08	3.935E+03	1.967E+01	1.955E+01	1.955E+01
1	Resident 1	3	3.076E-06	1.267E-08	7.840E-08	7.820E-08	1.043E+01	4.292E-02	2.646E-01	2.646E-01
1	Resident 1	4	1.643E-06	6.766E-09	4.188E-08	4.177E-08	4.813E+01	1.982E-01	1.222E+00	1.222E+00
CONCENTRATION TOTALS			8.654E-06	3.910E-08	1.398E-07	1.395E-07	3.994E+03	1.991E+01	2.104E+01	2.104E+01
2	Resident 2	1	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
2	Resident 2	2	6.064E-06	3.031E-08	3.012E-08	3.012E-08	6.064E+03	3.031E+01	3.012E+01	3.012E+01
2	Resident 2	3	1.257E-06	5.177E-09	3.205E-08	3.197E-08	4.261E+00	1.755E-02	1.082E-01	1.082E-01
2	Resident 2	4	7.392E-07	3.044E-09	1.884E-08	1.879E-08	2.165E+01	8.915E-02	5.497E-01	5.497E-01
CONCENTRATION TOTALS			8.060E-06	3.854E-08	8.101E-08	8.089E-08	6.090E+03	3.042E+01	3.078E+01	3.078E+01
3	Resident 3	1	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
3	Resident 3	2	4.372E-06	2.185E-08	2.172E-08	2.172E-08	4.372E+03	2.185E+01	2.172E+01	2.172E+01
3	Resident 3	3	3.316E-05	1.365E-07	8.451E-07	8.430E-07	1.124E+02	4.627E-01	2.853E+00	2.853E+00
3	Resident 3	4	2.696E-05	1.110E-07	6.871E-07	6.854E-07	7.896E+02	3.251E+00	2.005E+01	2.005E+01
CONCENTRATION TOTALS			6.449E-05	2.694E-07	1.554E-06	1.550E-06	5.274E+03	2.557E+01	4.462E+01	4.462E+01
4	Resident 4	1	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
4	Resident 4	2	4.579E-06	2.289E-08	2.275E-08	2.275E-08	4.579E+03	2.289E+01	2.275E+01	2.275E+01
4	Resident 4	3	5.969E-05	2.458E-07	1.521E-06	1.518E-06	2.023E+02	8.329E-01	5.135E+00	5.135E+00
4	Resident 4	4	5.069E-05	2.087E-07	1.292E-06	1.289E-06	1.485E+03	6.114E+00	3.769E+01	3.769E+01
CONCENTRATION TOTALS			1.150E-04	4.774E-07	2.836E-06	2.829E-06	6.266E+03	2.984E+01	6.558E+01	6.558E+01
5	Grazing Area 5	1	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
5	Grazing Area 5	2	6.192E-07	3.096E-09	3.076E-09	3.076E-09	6.192E+02	3.096E+00	3.076E+00	3.076E+00
5	Grazing Area 5	3	7.076E-07	2.914E-09	1.804E-08	1.799E-08	2.398E+00	9.874E-03	6.088E-02	6.088E-02
5	Grazing Area 5	4	3.285E-07	1.353E-09	8.373E-09	8.353E-09	9.623E+00	3.962E-02	2.443E-01	2.443E-01
CONCENTRATION TOTALS			1.655E-06	7.362E-09	2.949E-08	2.942E-08	6.313E+02	3.145E+00	3.381E+00	3.381E+00
6	Resident 6	1	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
6	Resident 6	2	1.562E-06	7.808E-09	7.758E-09	7.758E-09	1.562E+03	7.808E+00	7.758E+00	7.758E+00
6	Resident 6	3	1.141E-06	4.697E-09	2.908E-08	2.900E-08	3.866E+00	1.592E-02	9.815E-02	9.815E-02
6	Resident 6	4	6.324E-07	2.604E-09	1.612E-08	1.608E-08	1.852E+01	7.627E-02	4.702E-01	4.702E-01
CONCENTRATION TOTALS			3.335E-06	1.511E-08	5.295E-08	5.284E-08	1.584E+03	7.900E+00	8.327E+00	8.327E+00
7	Resident 7	1	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
7	Resident 7	2	6.525E-07	3.262E-09	3.242E-09	3.242E-09	6.525E+02	3.262E+00	3.242E+00	3.242E+00
7	Resident 7	3	8.397E-08	3.458E-10	2.140E-09	2.135E-09	2.846E-01	1.172E-03	7.224E-03	7.224E-03
7	Resident 7	4	3.531E-08	1.454E-10	8.999E-10	8.977E-10	1.034E+00	4.258E-03	2.625E-02	2.625E-02
CONCENTRATION TOTALS			7.718E-07	3.753E-09	6.282E-09	6.274E-09	6.538E+02	3.268E+00	3.275E+00	3.275E+00
8	Resident 8	1	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
8	Resident 8	2	2.362E-07	1.181E-09	1.173E-09	1.173E-09	2.362E+02	1.181E+00	1.173E+00	1.173E+00
8	Resident 8	3	8.773E-08	3.612E-10	2.236E-09	2.230E-09	2.973E-01	1.224E-03	7.548E-03	7.548E-03
8	Resident 8	4	3.031E-08	1.248E-10	7.724E-10	7.705E-10	8.877E-01	3.655E-03	2.253E-02	2.253E-02
CONCENTRATION TOTALS			3.542E-07	1.667E-09	4.182E-09	4.174E-09	2.374E+02	1.186E+00	1.203E+00	1.203E+00

REGION: SAMPLE ISL FACILITY
METSET: GENERIC MET STATION

CODE: MILDOS-AREA (02/97)
DATA: sampisl.dat

PAGE 29
03/14/97

TIME STEP NUMBER 2, 10-Year Restoration DURATION IN YRS IS... 10.0

NO.	INDIVIDUAL RECEPTOR RADON AND RADON DAUGHTER CONCENTRATIONS							GROUND CONCENTRATIONS, PCI/M2				
	AIRBORNE CONCENTRATIONS, PCI/M3											
	Rn-222	Po-218	Pb-214	Bi-214	Pb-210	Bi-210	Po-210	WL	Po-218	Pb-214	Bi-214	Pb-210
1	7.431E-02	7.335E-02	5.050E-02	3.548E-02	7.676E-08	1.848E-10	1.244E-14	4.639E-07	5.809E-02	5.809E-02	5.809E-02	1.337E+00
2	7.777E-02	7.666E-02	4.981E-02	3.170E-02	5.288E-08	1.006E-10	5.391E-15	4.497E-07	6.071E-02	6.071E-02	6.071E-02	1.290E+00
3	1.720E-01	1.553E-01	6.606E-02	3.033E-02	2.826E-08	3.119E-11	9.892E-16	6.081E-07	1.230E-01	1.230E-01	1.230E-01	1.327E+00
4	2.765E-01	2.391E-01	8.661E-02	3.263E-02	2.230E-08	1.851E-11	4.478E-16	8.071E-07	1.894E-01	1.894E-01	1.894E-01	1.938E+00
5	3.979E-02	3.956E-02	3.012E-02	2.283E-02	5.814E-08	1.592E-10	1.194E-14	2.786E-07	3.134E-02	3.134E-02	3.134E-02	1.271E+00
6	9.259E-02	9.082E-02	5.426E-02	3.028E-02	3.727E-08	5.414E-11	2.307E-15	4.816E-07	7.193E-02	7.193E-02	7.193E-02	1.133E+00
7	3.475E-02	3.470E-02	2.833E-02	2.201E-02	5.561E-08	1.500E-10	1.109E-14	2.615E-07	2.748E-02	2.748E-02	2.748E-02	1.601E+00
8	1.222E-02	1.222E-02	1.113E-02	1.009E-02	5.650E-08	3.079E-10	4.398E-14	1.067E-07	9.680E-03	9.680E-03	9.680E-03	2.045E+00

REGION: SAMPLE ISL FACILITY
METSET: GENERIC MET STATION

CODE: MILDOS-AREA (02/97)
DATA: sampisl.dat

PAGE 30
03/14/97

TIME STEP NUMBER 2, 10-Year Restoration DURATION IN YRS IS... 10.0

NUMBER 1 NAME=Resident 1 X= 1.0KM, Y= 1.3KM, Z= 0.0M, DIST= 1.7KM, IRTYPE= 0

RESULTS OF ALC CHECK AT THIS LOCATION

	U-238	U-234	Th-230	Ra-226	Rn-222(WL)	Pb-210	Bi-210	Po-210
CONC., PCI/M3	8.65E-06	8.65E-06	3.91E-08	1.40E-07	4.64E-07	2.16E-07	1.40E-07	1.40E-07
ALC, PCI/M3	6.00E-02	5.00E-02	3.00E-02	9.00E-01	1.10E-03	6.00E-01	4.00E+01	9.00E-01
FRACTION OF ALC	1.44E-04	1.73E-04	1.30E-06	1.55E-07	4.22E-04	3.60E-07	3.49E-09	1.55E-07

SUM OF FRACTIONS EQUALS 7.41E-04

NUMBER 2 NAME=Resident 2 X= 1.5KM, Y= 0.1KM, Z= 0.0M, DIST= 1.5KM, IRTYPE= 0

RESULTS OF ALC CHECK AT THIS LOCATION

	U-238	U-234	Th-230	Ra-226	Rn-222(WL)	Pb-210	Bi-210	Po-210
CONC., PCI/M3	8.06E-06	8.06E-06	3.85E-08	8.10E-08	4.50E-07	1.34E-07	8.10E-08	8.09E-08
ALC, PCI/M3	6.00E-02	5.00E-02	3.00E-02	9.00E-01	1.10E-03	6.00E-01	4.00E+01	9.00E-01
FRACTION OF ALC	1.34E-04	1.61E-04	1.28E-06	9.00E-08	4.09E-04	2.23E-07	2.02E-09	8.99E-08

SUM OF FRACTIONS EQUALS 7.06E-04

REGION: SAMPLE ISL FACILITY
METSET: GENERIC MET STATION

CODE: MILDOS-AREA (02/97)
DATA: sampisl.dat

PAGE 31
03/14/97

TIME STEP NUMBER 2, 10-Year Restoration DURATION IN YRS IS... 10.0

NUMBER 3 NAME=Resident 3 X= 1.0KM, Y= -1.3KM, Z= 0.0M, DIST= 1.6KM, IRTYPE= 0

RESULTS OF ALC CHECK AT THIS LOCATION

	U-238	U-234	Th-230	Ra-226	Rn-222(WL)	Pb-210	Bi-210	Po-210
CONC., PCI/M3	6.45E-05	6.45E-05	2.69E-07	1.55E-06	6.08E-07	1.58E-06	1.55E-06	1.55E-06
ALC, PCI/M3	6.00E-02	5.00E-02	3.00E-02	9.00E-01	1.10E-03	6.00E-01	4.00E+01	9.00E-01
FRACTION OF ALC	1.07E-03	1.29E-03	8.98E-06	1.73E-06	5.53E-04	2.63E-06	3.88E-08	1.72E-06

SUM OF FRACTIONS EQUALS 2.93E-03

NUMBER 4 NAME=Resident 4 X= 0.2KM, Y= -2.6KM, Z= 0.0M, DIST= 2.6KM, IRTYPE= 0

RESULTS OF ALC CHECK AT THIS LOCATION

	U-238	U-234	Th-230	Ra-226	Rn-222(WL)	Pb-210	Bi-210	Po-210
CONC., PCI/M3	1.15E-04	1.15E-04	4.77E-07	2.84E-06	8.07E-07	2.85E-06	2.83E-06	2.83E-06
ALC, PCI/M3	6.00E-02	5.00E-02	3.00E-02	9.00E-01	1.10E-03	6.00E-01	4.00E+01	9.00E-01
FRACTION OF ALC	1.92E-03	2.30E-03	1.59E-05	3.15E-06	7.34E-04	4.75E-06	7.07E-08	3.14E-06

SUM OF FRACTIONS EQUALS 4.98E-03

REGION: SAMPLE ISL FACILITY
METSET: GENERIC MET STATION

CODE: MILDOS-AREA (02/97)
DATA: sampisl.dat

PAGE 32
03/14/97

TIME STEP NUMBER 2, 10-Year Restoration DURATION IN YRS IS... 10.0

NUMBER 5 NAME=Grazing Area 5 X= -3.2KM, Y= 1.3KM, Z= 0.0M, DIST= 3.4KM, IRTYPE= 0

RESULTS OF ALC CHECK AT THIS LOCATION

	U-238	U-234	Th-230	Ra-226	Rn-222 (WL)	Pb-210	Bi-210	Po-210
CONC., PCI/M3	1.66E-06	1.66E-06	7.36E-09	2.95E-08	2.79E-07	8.76E-08	2.96E-08	2.94E-08
ALC, PCI/M3	6.00E-02	5.00E-02	3.00E-02	9.00E-01	1.10E-03	6.00E-01	4.00E+01	9.00E-01
FRACTION OF ALC	2.76E-05	3.31E-05	2.45E-07	3.28E-08	2.53E-04	1.46E-07	7.39E-10	3.27E-08

SUM OF FRACTIONS EQUALS 3.14E-04

NUMBER 6 NAME=Resident 6 X= -2.3KM, Y= -0.1KM, Z= 0.0M, DIST= 2.3KM, IRTYPE= 0

RESULTS OF ALC CHECK AT THIS LOCATION

	U-238	U-234	Th-230	Ra-226	Rn-222 (WL)	Pb-210	Bi-210	Po-210
CONC., PCI/M3	3.33E-06	3.33E-06	1.51E-08	5.30E-08	4.82E-07	9.01E-08	5.29E-08	5.28E-08
ALC, PCI/M3	6.00E-02	5.00E-02	3.00E-02	9.00E-01	1.10E-03	6.00E-01	4.00E+01	9.00E-01
FRACTION OF ALC	5.56E-05	6.67E-05	5.04E-07	5.88E-08	4.38E-04	1.50E-07	1.32E-09	5.87E-08

SUM OF FRACTIONS EQUALS 5.61E-04

REGION: SAMPLE ISL FACILITY
METSET: GENERIC MET STATION

CODE: MILDOS-AREA (02/97)
DATA: sampisl.dat

PAGE 33
03/14/97

TIME STEP NUMBER 2, 10-Year Restoration DURATION IN YRS IS... 10.0

NUMBER 7 NAME=Resident 7 X= -4.4KM, Y= -1.5KM, Z= 0.0M, DIST= 4.7KM, IRTYPE= 0

RESULTS OF ALC CHECK AT THIS LOCATION

	U-238	U-234	Th-230	Ra-226	Rn-222(WL)	Pb-210	Bi-210	Po-210
CONC., PCI/M3	7.72E-07	7.72E-07	3.75E-09	6.28E-09	2.61E-07	6.19E-08	6.42E-09	6.27E-09
ALC, PCI/M3	6.00E-02	5.00E-02	3.00E-02	9.00E-01	1.10E-03	6.00E-01	4.00E+01	9.00E-01
FRACTION OF ALC	1.29E-05	1.54E-05	1.25E-07	6.98E-09	2.38E-04	1.03E-07	1.61E-10	6.97E-09

SUM OF FRACTIONS EQUALS 2.66E-04

NUMBER 8 NAME=Resident 8 X= -6.3KM, Y= 2.0KM, Z= 0.0M, DIST= 6.6KM, IRTYPE= 0

RESULTS OF ALC CHECK AT THIS LOCATION

	U-238	U-234	Th-230	Ra-226	Rn-222(WL)	Pb-210	Bi-210	Po-210
CONC., PCI/M3	3.54E-07	3.54E-07	1.67E-09	4.18E-09	1.07E-07	6.07E-08	4.48E-09	4.17E-09
ALC, PCI/M3	6.00E-02	5.00E-02	3.00E-02	9.00E-01	1.10E-03	6.00E-01	4.00E+01	9.00E-01
FRACTION OF ALC	5.90E-06	7.08E-06	5.56E-08	4.65E-09	9.70E-05	1.01E-07	1.12E-10	4.64E-09

SUM OF FRACTIONS EQUALS 1.10E-04

Program execution time = 24.16 seconds